

**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX




## 2025 RETAIL Price Book

	<b>Page</b>
<b>Wood Chimney</b>	
Excel 103HT Class A Chimney	3-10
R.I.S. Chimney	11-16
Ultrablack Double Wall Stove Pipe <b>7" NON-STOCK WITH EXTENDED LEAD TIMES</b>	17
Excel Prime Black Stove Pipe <b>7" NON-STOCK - MADE TO ORDER</b>	18-19
<b>Pellet Venting</b>	
Excel Pellet Venting	20-23
<b>Wood Liner</b>	
Excel Rigid Liner	24-25
<b>Gas Venting</b>	
Excel Direct Vent	26-30
Excel Direct Power Vent ( <b>Currently Approved for Ortal &amp; Urbana Fireplaces</b> )	31-33
Excel Direct Power Vent Required Components Guide - <b>for Ortal Fireplaces</b>	34-35
Excel Direct Power Vent vs. CVS (Duravent) - "Compare Components" List	36



### EXCELDirect Power Vent®

High-Temp Rubberized Silicone Gaskets

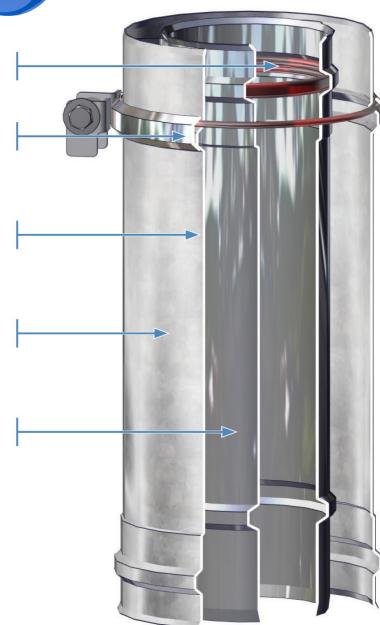

Heavy-Duty S/S Locking Band

Precision Laser-Welded Construction

5" Diameter Galvalume Exterior

3" Diameter 444 Stainless Interior

#### **EXCEL POWER VENT ADVANTAGE:**

- **CURRENTLY APPROVED FOR ORTAL & URBANA** (pending w/other top fireplace manufacturers)
- **Listed to 550 Degrees F** (higher than other brands)
- **Tightest Seals on the Market**
- **Locking Bands for "Rigid Pipe"** (allows for longer venting runs)
- **No Twist-Lock** - Adjust Pipe and Fittings as Needed
- **Clean Assembly** - NO Lubricants on Pipe or Components for Mess-Free



**AES**

Order Online at:  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

Excel 103HT Insulated Class A Chimney



Excel Chimney is the only chimney sold in the U.S.A. that meets the more stringent Canadian 30 minute chimney fire test. This means that with Excel, your customers are getting the safest chimney on the market.

There are no couplings on the ends of Excel 103HT. Eliminating the coupling also eliminates the thermal bridge between the flue and the casing. With Excel 103HT, the insulation runs continuously from section to section. As a result, there are no hot spots.

With the continuous weld of Excel 103HT, there are only two thicknesses of materials, and only 1/4" of overlap. This allows the flue to expand and contract uniformly around its circumference. The continuous weld on Excel 103HT is totally watertight, eliminating a potential source of chimney corrosion.

Excel 103HT "Smart Parts" make it the easiest chimney system available to install and inventory. 6" Excel 103HT only requires a 10" hole in the ceiling when used with its round or square support. Most brands require a 12" hole. Since roof trusses and floor joists rarely line up with the desired chimney location, a smaller support almost always makes the installation easier.

Excel 103HT is the first insulated chimney to offer adjustable lengths. Adjustable lengths relieve many installation headaches by allowing unlimited center-to-center offsets, easy balancing of cap heights and painless overall length adjustment.

Adjustable wall supports allow for variations in wall finish, virtually eliminating bracing and blocking. The Excel 103HT wall support installs above the insulated tee which virtually allows it to be screwed to the framing instead of anchored into concrete. Excel roof supports, wall supports, offset supports and roof braces adjust to fit 6, 7 and 8 inch chimney.

Excel is protected by a comprehensive lifetime warranty. The warranty provides for full replacement of any chimney lengths damaged as a result of normal wood stove or fireplace operation (including chimney fires) for a period of ten years from the date of installation. See installation guide for details.



Industrial Chimney Company manufactures product from 5" up to 24" inner diameter. For pricing and availability, call AES Inside Sales.






Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company



Excel 103HT Insulated Class A Chimney

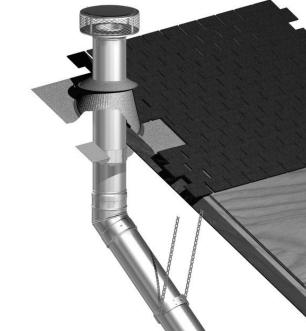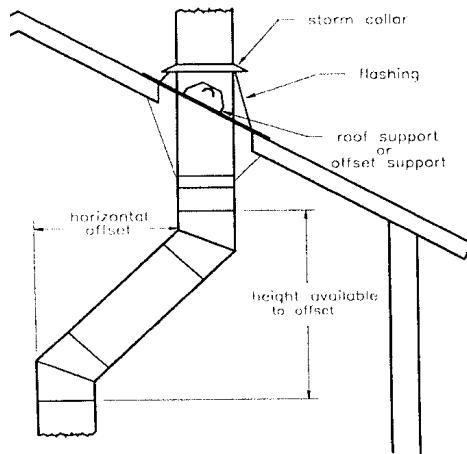

Typical Offset, Two Story Installation

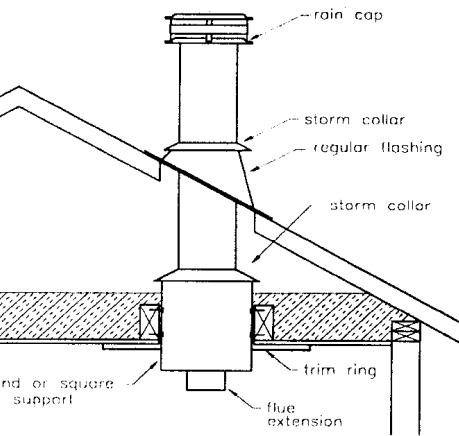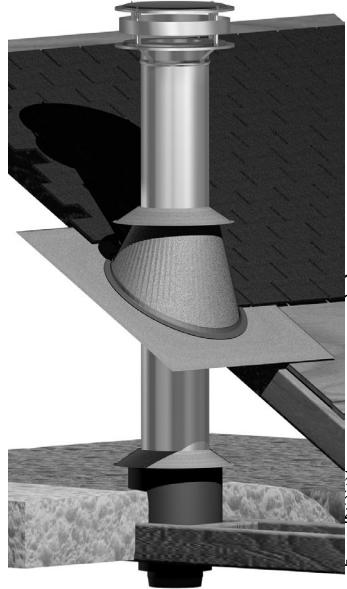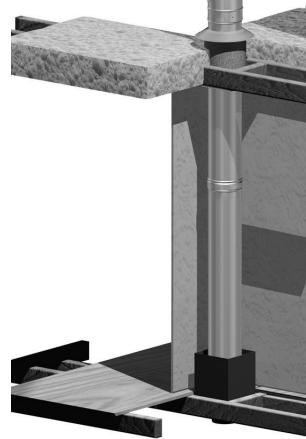

Typical Main Floor Installation

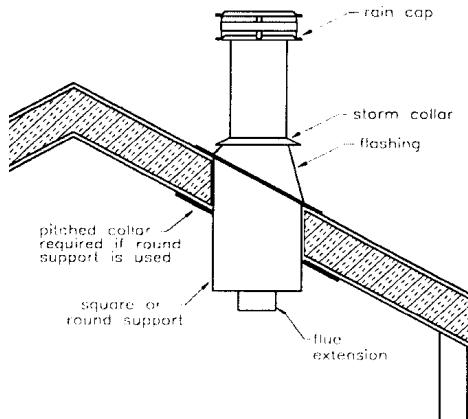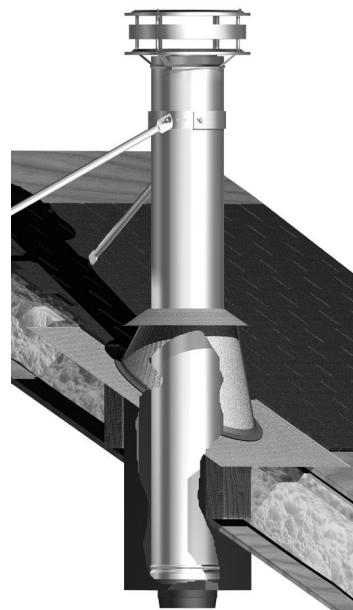

Typical Cathedral Installation


**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)


Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company


Excel 103HT Insulated Class A Chimney

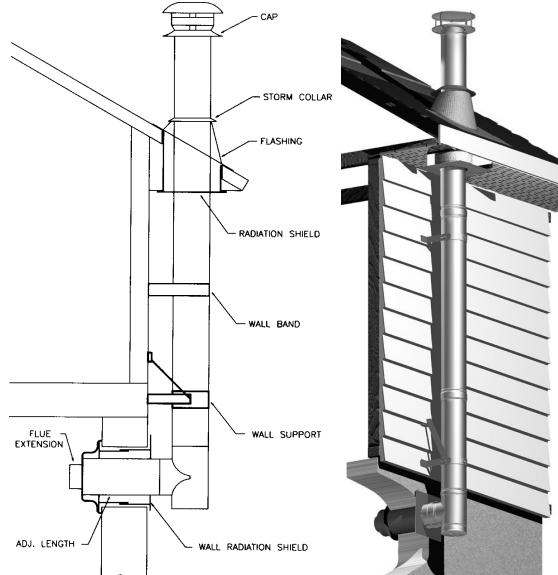

Typical Through-Wall Installation

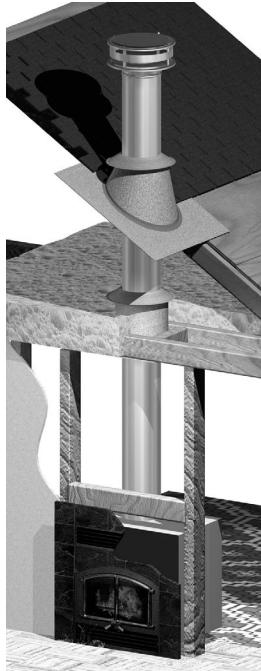

Typical Zero-Clearance Installation

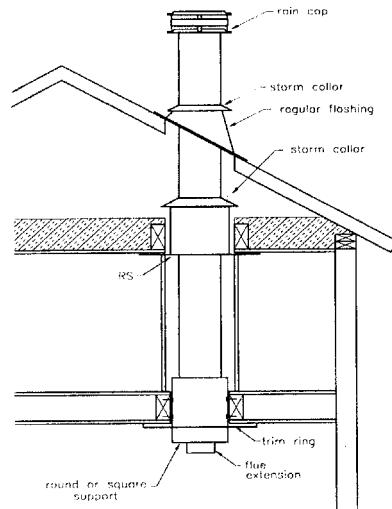

Typical Interior 2-story Free-standing Installation



Adjustable Length



Tee



Elbow



Square Support

### Insulated Lengths

Excel chimney sections are available in 48", 24", 18", 12" and 6" lengths as well as an 18" adjustable length. This unique part enables an installer to adjust the system to the exact overall length required for any installation. The most common applications are between elbows to achieve any required center-to-center offset. This balances the chimney height when necessary so that the caps line up for functional or aesthetic reasons. Also used when a specific horizontal offset is required. The adjustable length must be installed above a straight chimney section. It will not adjust into an elbow or tee.

### Tee

The insulated tee may be used on the interior or exterior of the building and in combination with a wall support assembly. Tee cap has a handle on the bottom to simplify removal for cleaning.

### Elbows

Excel elbows are available in 15, 30 and 45 degrees. All Excel elbows are tested and listed to the UL 103HT and ULC S629 standards. Please consult your local inspector before using 45 degree elbows.

### Round and Square Supports

Excel 103HT ceiling supports are suitable for use on all flat or sloping ceilings. They must project into the room a minimum of 3 inches on a flat ceiling. These supports are designed to act as a combination of support and attic radiation shield. To use either support as an attic radiation shield, simply close the open area at the top of the support (in the attic) with a storm collar. The trim collars are separate from the supports allowing for easy installation before or after the ceiling finish is applied. Square supports include a black end cap and trim ring.

### Support Extensions

Support extensions are available to facilitate installations on very steep pitched ceilings or where the chimney must project unusually far into the room. Both the round and square support extensions are 24" long.

### Flue Extension

The flue extension fastens to the bottom of the first chimney section with three screws making it


## Industrial Chimney Company

### Excel 103HT Insulated Class A Chimney



#### Wall Radiation Shield

The wall radiation shield is used when the chimney passes horizontally through a combustible wall. The WRS telescopes to adjust for wall thickness, so no painting is required. The inside trim collar is separate from the WRS, allowing for easy installation before or after the wall finish is applied. Includes a flue extension and trim ring.



Wall Radiation  
Shield

#### Wall Support/Wall Band


The wall support is used to support the vertical chimney on a through-the-wall installation. It installs on the first section of the chimney above the tee (not on the tee itself) thus making it easier to fasten the support to framing instead of into concrete. It is a universal design made to slide in and out to fit a variety of wall profiles. An Extended Wall Support is available (in place of the standard Wall Support) for installations requiring added extension flexibility.



Wall Band

#### Trim Rings

Used to finish round supports. Chimney Trim Rings are used to finish chimney pipe with no support.



Trim Ring

#### Locking Band

All Excel 103HT insulated components are designed to be fastened together with the stainless steel screws provided with each part. In some cases, it may be desirable to install a locking band. The locking band is designed to overlap the two beads immediately above and below the chimney joint and fasten with a 1/4" bolt.



Roof Support

#### Wall Channel

The wall channel enables a wall support or wall band to be fastened solidly to the framing when the framing centers don't line up with the chimney opening. The wall channel is 24" long.



Radiation Shield

#### Roof Support

The roof support is primarily used when it is difficult to use a round or square support in a cathedral ceiling. It can also be used above an offset or to provide additional support when the chimney height exceeds the capacity of the primary support. The roof support utilizes a universal band and is made with adjustable brackets allowing it to adjust easily to any roof pitch.

#### Offset Support

The offset support is primarily used to re-support the chimney above an offset, however it may also be used to provide additional support when the chimney height exceeds the capacity of the primary support. The offset support straps are 24" long.

#### Roof Brace

The roof brace is used to provide lateral support for a chimney which extends more than 5 feet above a roof. The roof brace utilizes a universal band to fit 6, 7 and 8 inch chimneys. The arms on the roof brace telescope from 5 feet to 10 feet long.



Chimney Top

#### Radiation Shield

The radiation shield is used to protect combustible framing in the floor or ceiling adjacent to the chimney. It serves as a firestop spacer to prevent a fire from traveling through the opening between the chimney and the framing. Use the Insulated Radiation Shield for energy efficient construction.

#### Chimney Top Damper

Adding this "Top Damper" to a system seals it right at the top of the chimney. The "Chimney Top Damper" is placed directly below the cap and is designed to prevent any cold air infiltration into the

**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

### Excel 103HT Insulated Class A Chimney

#### Anchor Plate

The anchor plate is used to fasten an Excel chimney system to a masonry fireplace or extend an existing masonry chimney.



Snow Wedge

#### Snow Wedge

Protects from heavy snow load. Fasten to plywood or backing with a minimum of 8 screws. Tabs on wedge are adjustable from 4/12 roof pitch up to 12/12.

#### Rain Cap

Excel rain caps are made entirely of stainless steel. The dome is designed to shed rain and debris, while optimizing draft. Excel chimneys must be installed with an Excel rain cap. The deluxe cap also has a skirt to deflect wind and a stainless steel band to reduce the entry of driving rain. An optional spark screen is available to help arrest sparks in installations where they may pose a safety problem. The rain cap is very easy to install and to remove for cleaning and is held in place by four screws through the tabs provided into the chimney.



Regular Rain Cap

#### Revolving Rain Cap

The revolving rain cap helps to prevent the entry of wind driven rain and helps to prevent wind induced downdrafts.



Revolving Rain Cap

#### Deluxe Rain Cap

The deluxe cap is made from .025" thick type 304 stainless steel and carries a lifetime 100% full replacement warranty.

#### Rain Cap Base

The bottom portion only of the rain cap to allow for a custom chimney top termination.

#### Spark Screen

Used in conjunction with a rain cap for spark protection.



Decorative Caps

#### Decorative Caps - Round & Square

The decorative caps are designed to simulate terra cotta chimney pots for superior aesthetics when terminating a site fabricated chase. They can also be used to terminate a chimney liner in a masonry chimney. A decorative cap flashing is required. NOTE: The installation requirements for these caps are quite specific and should be reviewed before constructing the chase.



Flexible Base Flashing

#### Flexible Base Flashing

The flexible base flashing combines a stainless steel cone with a flexible lead base which can be easily formed on site to match virtually any roof profile. It was designed for masonry tile roofs but can be used wherever a flexible base is required.

#### Decorative Cap Flashing


The decorative cap flashing is made from galvalume steel only and is required with the decorative cap.

#### Flashings


Standard flashings are available in a variety of configurations to suit various chimney diameters, roof slopes and installation types. Ventilated flashings are intended for mobile home use and for installations where the chimney is enclosed in the attic. All flashings include a collar.

#### Metal Roof Flashings

Metal roof flashings are designed to be easily installed on most metal roof profiles. These flashings are offered in a variety of configurations to suit most roof slopes. Offered in galval-



Flat Flashing



Metal Roof Flashing



Peak Flashing



Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

### Excel 103HT Insulated Class A Chimney



#### Stainless Steel EXCEL Insulated Lengths

 For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	5"	6"	7"	8"
ICXC_EL6	6" Length	\$152.00	\$170.00	\$204.00	\$250.00
ICXC_EL12	12" Length	164.00*	182.00	216.00	264.00
ICXC_EL18	18" Length	192.00*	211.00	250.00	303.00
ICXC_ELA18	18" Adjustable Length	260.00*	290.00	358.00	418.00
ICXC_EL24	24" Length	260.00*	290.00	358.00	418.00
ICXC_EL36	36" Length	374.00	413.00	492.00	600.00
ICXC_EL48	48" Length	442.00	492.00	633.00	740.00

#### Stainless Steel Tees and Elbows

ICXE_ETI	Insulated Tee w/Cap	\$474.00*	\$526.00	\$675.00	\$773.00
ICXE_EITC	Insulated Tee Cap (optional)	134.00*	151.00*	166.00*	180.00*
ICXE_EE15	15° Elbow	248.00*	276.00	315.00	376.00
ICXE_EE30	30° Elbow	362.00*	401.00	418.00	480.00
ICXE_EE45	45° Elbow (Approved for Canada Only)	384.00	427.00	470.00	521.00

#### Caps

ICXM_ERC	Regular Rain Cap	\$146.00*	\$148.00	\$164.00	\$192.00	
ICXM_EDRC	Deluxe Rain Cap	-	192.00	238.00	297.00	
ICXM_ERCB	Rain Cap Base	-	44.00	48.00	52.00	
ICXM_ERRC	Revolving Rain Cap (Add ICXMERCS if Sparkscreen is desired)	-	485.00	485.00	485.00	
ICXM_EDRCSS	Deluxe Rain Cap w/Screen (Stocked in CA)	-	238.00	263.00	315.00	
ICXM_ERCSS	Regular Rain Cap w/Screen (Stocked in CA)	-	183.00	199.00	215.00	
ICXMERCS	Spark Screen - Stainless Steel (Adjustable 5" - 8")		48.00			
ICXMERCW	Wind Shield		113.00			

#### Supports

ICXM_ERDS	Round Support	\$238.00*	\$254.00	\$260.00	\$268.00
ICXM_ERDSI	Insulated Round Support	-	435.00	461.00*	485.00
ICXM_ES	Galvanized Ceiling Support	158.00*	158.00*	168.00*	185.00*
ICXM_ESS	Square Support Box	-	268.00	272.00	281.00
ICXM6ESS12	Square Support Box 12"x12" (SQS Special)	-	274.00	-	-



## Industrial Chimney Company

### Excel 103HT Insulated Class A Chimney



#### Supports



For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	5"	6"	7"	8"
ICXM_ERTA	Round Support Trim Ring, 1/12-4/12	-		\$111.00	
ICXM_ERTB	Round Support Trim Ring, 4/12-8/12	-		111.00	
ICXM_ERTC	Round Support Trim Ring, 8/12-12/12	-		111.00	111.00*
ICXM_ERDSE	Round Support Extension, 24" Long	-	-		120.00
ICXM_ESSE	Square Support Extension, 24" Long	-	91.00	99.00	108.00
ICXM_ECT	Flat Chimney Trim Ring	-		91.00	
ICXM_ECTA	Chimney Trim Ring, 1/12-4/12	-		111.00	
ICXM_ECTB	Chimney Trim Ring, 4/12-8/12	-		111.00	
ICXM_ECTC	Chimney Trim Ring, 8/12-12/12	-		111.00	
ICXM5ESR	5" Roof Support	130.00		-	
ICXM5EWS	5" Wall Support	123.00*		-	
ICXM5EOS	5" Offset Support	72.00*		-	
ICXMESR	6", 7", 8" Roof Support	-		142.00	
ICXMEWS	6", 7", 8" Wall Support	-		123.00	
ICXMEOS	6", 7", 8" Offset Support - 24" Long	-		77.00	
ICXMEWSE	Extended Wall Support, 12 1/2" - 18 1/2"	-		259.00	
ICXMEWSR	Wall Support (Old Style)	-		168.00	
ICXM56ERDSE	Round Support Extension Collar	113.00		-	
ICXMESQSC	Square Support Attic Collar and Roof Flashing (5 1/4" Wide Storm Collar, Used on Square Support as Insulation Shield) <b>LIMITED TO STOCK ON HAND, NEW BELOW</b>			58.00	
ICXM_ESQSC	Square Support Storm Collar <b>WILL NOT SHIP UNTIL ICXMESQSC STOCK DEPLETED</b>	-	81.00	87.00	TBD
ICXMEGEG	Gable End Guide, Adjustable Arms Fit up to 12/12 Pitch	-		108.00	



#### Flashings (All ICC flashings include a Storm Collar)

ICXF_EF	Flat Flashing	\$144.00*	\$160.00	\$185.00	\$216.00
ICXF_EFA	Flashing, 1/12 - 7/12	144.00*	160.00	185.00	216.00
ICXF_EFB	Flashing, 8/12 - 12/12	152.00*	170.00	195.00	225.00
ICXF_EFC	Flashing, 12/12 - 21/12	204.00*	225.00	250.00	286.00
ICXF_EMFA	Metal Roof Flashing, 1/12 - 7/12	215.00*	231.00	256.00	288.00
ICXF_EMFB	Metal Roof Flashing, 8/12 - 12/12	221.00	238.00	262.00	293.00
ICXF_EMFC	Metal Roof Flashing, 12/12 - 21/12	274.00*	293.00	322.00	355.00
ICXF_EVF	Vented Flat Flashing	-	219.00	260.00	309.00*
ICXF_EVFA	Vented Flashing, 1/12 - 7/12	-	219.00	260.00	309.00
ICXF_EVFB	Vented Flashing, 8/12 - 12/12	-	226.00	268.00	317.00
ICXF_EVFC	Vented Flashing, 12/12 - 21/12	-	283.00	324.00*	374.00
ICXF_EFP	Peak Flashing, 2/12 - 12/12	-	346.00	353.00	358.00
ICXF_ESF	Stainless Steel Flat Flashing	-	295.00	315.00	334.00
ICXF_ESFA	Stainless Steel Flashing, 1/12 - 7/12	-	295.00	315.00	334.00
ICXF_ESFB	Stainless Steel Flashing, 8/12 - 12/12	-	312.00	333.00*	346.00
ICXF_ESFC	Stainless Steel Flashing, 12/12 - 21/12	-	382.00*	417.00*	452.00*
ICXF_ELFA	Flexible Base Flashing, 1/12 - 7/12	-		742.00	
ICXF_ELFB	Flexible Base Flashing, 8/12 - 12/12	-		742.00	



## Industrial Chimney Company

### Excel 103HT Insulated Class A Chimney



#### Firestops



For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	5"	6"	7"	8"
ICXM_ERS	Regular Radiation Shield/Firestop	\$108.00	\$120.00	\$139.00	\$148.00
ICXM_EWRS	Wall Radiation Shield	233.00	260.00	264.00	272.00
ICXM_EWRSI	Insulated Wall Radiation Shield	-	435.00	461.00	485.00
ICXM_EST	Stainless Steel Trim for EWRS	-		67.00	
ICXM_ERRS	Roof Radiation Shield	-	117.00	127.00	140.00
ICXM_ERSC	Cathedral Radiation Shield	-	207.00	231.00	254.00
ICXM_EWRSI30	Angled Firestop 30°	-		387.00	409.00
ICXM_EWRSI45	Angled Firestop 45°	-		387.00	409.00

#### Accessories

ICXM_EX	Flue Extension	\$98.00	\$108.00	\$113.00	\$120.00
ICXM_EAP	Anchor Plate	148.00	148.00	172.00	199.00
ICXM_EAPD	Anchor Plate Damper w/12" Chain	-		562.00*	
ICXM_EAPD2	Anchor Plate Damper w/Rod	-		499.00*	
ICXM_ETD	Chimney Top Damper	-	-	411.00*	435.00*
ICXM_ELB	Locking Band	-	44.00	48.00	52.00
ICXM5ERB	5" Roof Brace	245.00		-	
ICXMERB	6", 7", 8" Roof Brace	-		245.00	
ICXMESRB	6", 7", 8" Stainless Steel Roof Brace - Universal	-		393.00	
ICXMESW	Adjustable Snow Wedge, 4/12 - 12/12	-		397.00	
ICXMEAS	Adjustable Support Stud			105.00	
ICXMEWC	Wall Channel			70.00	
ICXMESSS	Stainless Tek Screws (100)			48.00	
ICXMESC	Storm Collar, 2" Wide			46.00	
ICXMESSC	Stainless Steel Storm Collar			87.00	
ICXMECR	Caulking Roll			21.00	
ICXMHK	Hardware Kit - Includes SS Bolts, Elevator Bolts, Thumb-screws, Wingnuts and Variety of Nuts and Washers			87.00	
ICXMERBS	Roof Brace Stiffener			215.00	
ICXF_EVCC	Ventilated Chase Cone	-	157.00	167.00	175.00

#### Dealer Showroom Display Items

Item No.	Description	Wt.	Retail
ICZZ6DISPLAY	ICC Chimney Pipe Showroom Display	200 lbs.	\$1,180.00

An instructional guide for your showroom. Highlights the safety features and most commonly used parts of Excel 103HT chimney for your customers. Comes complete with all venting components and signage. Footprint is approximately 2'D x 3'W.



**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

### Residential Insulated Stack (R.I.S.)




Residential Insulated Stack (R.I.S.) may be used to extend a masonry chimney which has been lined with an approved chimney liner. This type of repair is generally found where the original flue tile has been damaged by chimney fire or moisture and, in cases, where the flue has been relined to reduce its cross section. R.I.S. may also be used as a chimney for masonry fireplaces.

R.I.S. chimneys have been specifically designed, tested and listed to vent masonry fireplaces in residential installations and to extend existing masonry chimneys. One of the primary applications of R.I.S. is for the repair of earthquake damaged masonry fireplaces and chimneys. ICC provides components designed to correctly adapt its products to existing masonry construction and warrants the performance and mechanical integrity of its system when it is correctly installed on a structurally sound foundation.


The R.I.S. anchor plate has a single wall connector section designed to allow a metal chimney liner to be screwed directly to it. Refer to the Excel 103HT brochure at the end of this section for chimney sizing tables and recommendations on flue height.

The requirements for chimney repair vary substantially from jurisdiction to jurisdiction. We strongly recommend that you contact your local building officials to determine the requirements in your particular area before attempting any chimney repairs. Some municipalities have specific written repair requirements; most other areas are not as specific. Two sources of information concerning the construction and inspection of masonry chimneys and fireplaces are "The Residential Fireplace and Chimney Handbook" written by the Masonry Institute of America and "Repair of Earthquake Damaged Masonry Chimneys Using New Metal Chimneys" by the City of Los Angeles Departments of Building and Safety.

Stock status may vary between AES warehouse locations. To confirm stock status, log onto the AES Partners Site or call AES Customer Service 1-800-682-9722.

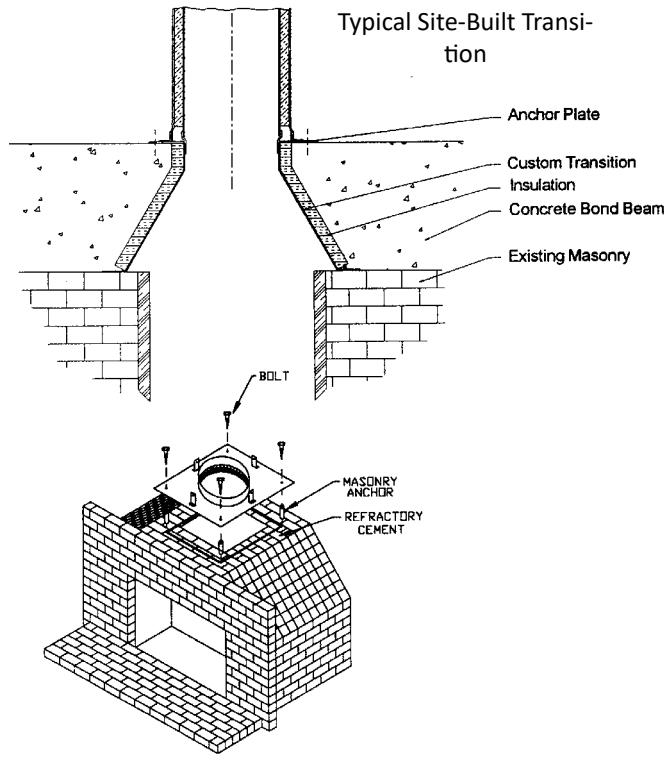

Typical Fireplace Installation

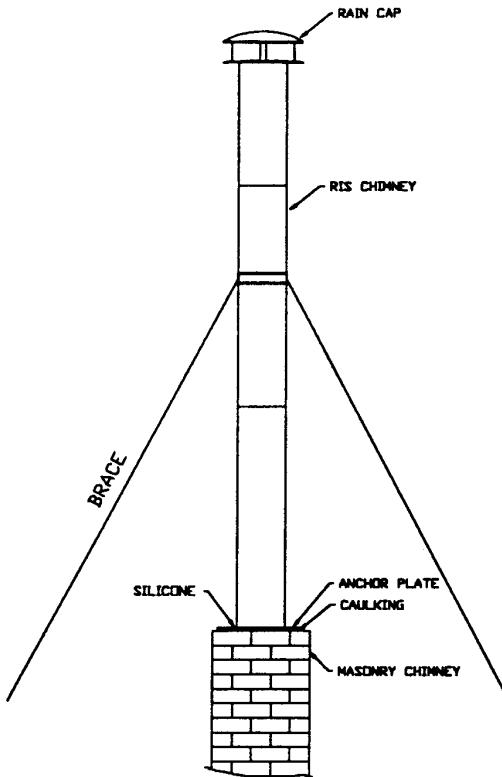



Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

Residential Insulated Stack (R.I.S.) Large Diameter Chimney 10"-24"



### R.I.S. Chimney Lengths - All Stainless Steel

 For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	10" (430 SS)	12" (430 SS)	14" (430 SS)	16" (304 SS) LIMITED TO STOCK ON HAND	18" (304 SS)	20" (304 SS)	22" (304 SS)	24" (304 SS)
ICRC_RIL4	48" Length	\$896.00	\$933.00	\$969.00	\$1,130.00**	\$1,718.00	\$1,912.00	\$2,114.00*	\$2,272.00*
ICRC_RIL2	24" Length	526.00	562.00	613.00	discontinued	1,007.00	1,119.00	1,230.00*	1,317.00*
ICRC_RIL18	18" Length	451.00	482.00	522.00	discontinued	822.00	918.00	1,017.00*	1,075.00*
ICRC_RIL1	12" Length	344.00	364.00	393.00	discontinued	606.00	679.00	735.00*	787.00*
ICRC_RILA2	24" Adj. Length	735.00	787.00	859.00	discontinued	1,411.00	1,568.00	1,720.00*	1,847.00*
ICRC_RILA1	12"Adj. Length	480.00	510.00	552.00**	578.00**	847.00	951.00	1,029.00*	1,101.00*
ICRE_RIT	Regular Tee	1,249.00	1,317.00	1,460.00*	discontinued	2,696.00*	3,078.00*	3,501.00*	3,930.00*
ICRE_RIE15	15° Elbow	585.00	683.00	737.00	discontinued	907.00*	995.00	1,115.00*	1,209.00*
ICRE_RIE30	30° Elbow	717.00	771.00	841.00	discontinued	1,035.00	1,147.00	1,284.00*	1,347.00*
ICRE_RIE45	45° Elbow	751.00	813.00	845.00	discontinued	1,131.00*	1,289.00	1,401.00*	-
ICRE_RITC	Regular Tee Cap	296.00	332.00*	372.00*	discontinued	468.00*	632.00*	709.00*	789.00*
ICRM_RSLB	Locking Band	74.00	80.00	88.00	79.00**	106.00*	118.00*	126.00*	137.00*

### R.I.S. Chimney Lengths - All Stainless Steel

Item No.	Description	-	-	-	16" (430 SS) NEW!	-	-	-	-
ICRC16RIL4-430	48" Length	-	-	-	\$1,073.00	-	-	-	-
ICRC16RIL2-430	24" Length	-	-	-	672.00	-	-	-	-
ICRC16RIL18-430	18" Length	-	-	-	569.00	-	-	-	-
ICRC16RIL1-430	12" Length	-	-	-	430.00	-	-	-	-
ICRC16RILA2-430	24" Adj. Length	-	-	-	939.00	-	-	-	-
ICRC16RILA1-430	12"Adj. Length	-	-	-	601.00	-	-	-	-
ICRE16RIT-430	Regular Tee	-	-	-	1,626.00	-	-	-	-
ICRE16RIE15-430	15° Elbow	-	-	-	754.00	-	-	-	-
ICRE16RIE30-430	30° Elbow	-	-	-	864.00	-	-	-	-
ICRE16RIE45-430	45° Elbow	-	-	-	925.00	-	-	-	-
ICRE16RITC-430	Regular Tee Cap	-	-	-	416.00	-	-	-	-
ICRM16RSLB-430	Locking Band	-	-	-	98.00	-	-	-	-

### Galvalume Items with Stainless Steel Lining

Item No.	Description	10"	12"	14"	16" (Galv) LIMITED TO STOCK ON HAND	18"	20"	22"	24"
ICRC_RIL4G	48" Length	-	-	-	discontinued	\$1,347.00	\$1,502.00	\$1,666.00*	\$1,784.00*
ICRC_RIL2G	24" Length	-	-	-	discontinued	819.00	913.00*	1,007.00*	1,075.00*
ICRC_RIL18G	18" Length	-	-	-	discontinued	683.00	763.00	839.00*	897.00*
ICRC_RIL1G	12" Length	-	-	-	350.00**	515.00	578.00	625.00*	665.00*
ICRC_RILA2G	24" Adj. Length	-	-	-	765.00**	1,145.00	1,281.00	1,411.00*	1,505.00*
ICRC_RILA1G	12" Adj. Length	-	-	-	discontinued	721.00	808.00	873.00*	929.00*
ICRE_RITG	Regular Tee	-	-	-	discontinued	2,198.00*	2,480.00*	2,792.00*	3,109.00*
ICRE_RIE15G	15° Elbow	-	-	-	discontinued	815.00	897.00	1,007.00*	1,087.00*
ICRE_RIE30G	30° Elbow	-	-	-	discontinued	933.00	1,035.00*	1,157.00*	1,211.00*
ICRE_RIE45G	45° Elbow	-	-	-	discontinued	1,017.00	1,159.00	1,263.00*	-
ICRM_RGLB	Locking Band	52.00*	52.00*	54.00*	discontinued	72.00*	78.00*	86.00*	92.00*
ICRM_RBSG	Base Support	409.00*	398.00*	404.00*	458.00*	519.00*	587.00*	658.00*	731.00*
ICRM_RWSG	Wall Support	-	-	569.00*	620.00	695.00*	756.00	833.00*	899.00*
ICRM_RWBG	Wall Band	126.00*	148.00*	186.00*	208.00	236.00*	386.00*	398.00*	404.00*



## Industrial Chimney Company

Residential Insulated Stack (R.I.S.) Large Diameter Chimney 10"-24"

### Supports



For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	10"	12"	14"	16"	18"	20"	22"	24"
ICRM_RBS	Base Support	\$1,011.00*	\$972.00*	\$991.00*	\$1,141.00*	1,303.00*	\$1,483.00*	\$1,666.00	\$1,863.00*
ICRM_RSR	Roof Support	245.00	393.00	529.00	585.00	658.00	756.00	815.00	881.00*
ICRM_RWS	Wall Support	231.00	262.00	881.00*	772.00*	1,376.00*	1,475.00*	1,717.00*	1,926.00*
ICRM_RAP	Anchor Plate	334.00	393.00	409.00	426.00	430.00	501.00	543.00	594.00*
ICRM_RAPD	Anchor Plate w/Damper	1,063.00	1,139.00	1,245.00	1,406.00	1,616.00*	2,006.00*	2,177.00*	2,463.00*
ICRM_ROS	Offset Support	212.00	378.00	533.00	594.00	672.00*	839.00*	911.00*	989.00*
ICRM_RWB	Wall Band	268.00	280.00	299.00	327.00	358.00*	378.00*	423.00	458.00*
ICRM_RGB	Guy Band	126.00	148.00	186.00	196.00	228.00	353.00*	364.00*	372.00*
ICRM_RRB	Roof Brace	376.00	390.00	432.00	472.00	508.00	632.00	644.00*	653.00*
ICRM_RRS	Radiation Shield	210.00	224.00	242.00	256.00	282.00	308.00*	339.00	364.00*
ICRM_RTS	Roof Top Radiation Shield	174.00	212.00	-	-	-	-	-	-
ICRM_RFS	Firestop	98.00	118.00	140.00	174.00	196.00	282.00	301.00	327.00*

### Caps and Accessories

ICRM_RRC	Rain Cap	\$461.00	\$482.00	\$580.00	\$669.00	\$771.00	\$947.00*	\$1,031.00	\$1,083.00
ICRM_RRCB	Rain Cap Base	231.00	240.00	292.00	334.00	386.00	475.00	519.00	543.00
ICRM_RRCFS	Rain Cap Firescreen	74.00	80.00	100.00	114.00	132.00	156.00*	182.00*	214.00*
ICRM_RRCSS	Rain Cap w/screen	533.00	562.00	679.00	782.00	904.00	1,101.00	1,211.00*	1,295.00*
ICRM_RDRC	Deluxe Rain Cap	573.00	611.00	-	-	-	-	-	-
ICRM_REX	Flue Extension	196.00	214.00	248.00	280.00*	316.00*	360.00*	404.00*	451.00*

### Flashings With Storm Collars

ICRF_RF	Flat Flashing	\$308.00	\$332.00	\$378.00	\$400.00	\$482.00	\$613.00	\$637.00	\$646.00*
ICRF_RFA	1-7/12 Flashing	355.00	383.00	435.00	458.00	555.00*	705.00	731.00	742.00*
ICRF_RFB	8-12/12 Flashing	416.00	449.00	510.00	540.00	651.00	827.00	859.00	873.00*
ICRF_RMFA	1/2-7/12 Flashing	418.00	477.00	-	-	-	-	-	-
ICRF_RMFB	8/12-12/12 Flashing	463.00*	533.00*	-	-	-	-	-	-
ICRF_RMFC	12/12-21/12 Flashing	519.00*	606.00*	-	-	-	-	-	-
ICRF_RVF	Vented Flat Flashing	395.00	456.00	-	-	-	-	-	-
ICRF_RVFA	1/12-7/12 Flashing	442.00	505.00	-	-	-	-	-	-
ICRF_RVFB	8/12-12/12 Flashing	503.00	578.00	-	-	-	-	-	-
ICRM_RSC	Storm Collar	74.00	80.00	100.00	118.00	132.00	158.00	188.00	222.00*
ICRM_RSCSS	S/S Storm Collar	114.00	126.00	177.00	198.00	228.00	273.00	294.00	339.00*

**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company




### Residential Insulated Stack (R.I.S.)



Diameter	10"	12"	14"	16"	18"	20"	22"	24"	
<b>R.I.S. Vertical Capacity Table</b>									
Anchor Plate	120'	102'	89'	78'	70'	64'	58'	53'	
Floor Support	120'	102'	89'	78'	70'	64'	58'	53'	
Wall Support	97'	82'	72'	63'	57'	51'	47'	43'	
Offset Support	40'	35'	30'	25'	20'	20'	20'	20'	
Roof Support	40'	35'	30'	25'	20'	20'	20'	20'	
Insulated Tee	53'	45'	39'	35'	31'	28'	26'	23'	
Chimney Length	120'	102'	89'	78'	70'	64'	58'	53'	
<b>R.I.S. Minimum Rough Opening Dimensions</b>									
Combustible Wall, Floor, or Roof	Hole Size (in)	16	18	20	22	24	26	28	30
Non-Combustible Wall, Floor, or Roof		13	15	17	19	21	23	25	27
<b>R.I.S. Chimney Dimensions</b>									
Approx Lbs./Ft.		6	7	8	9	13	14	16	17
Outer Diameter		12-1/4"	14-1/4"	16-1/4"	18-1/4"	20-1/4"	22-1/4"	24-1/4"	26-1/4"

#### R.I.S. Nominal to Installed Flue Length

Nominal Length	48"	24"	24" adj.	12"	12" adj.
Installed Length	46-1/4"	22-1/4"	13-1/2" to 22-1/4"	10-1/4"	7-1/2" to 10-1/4"

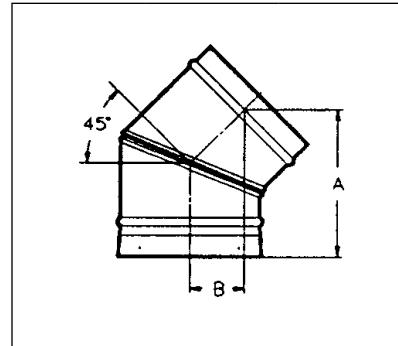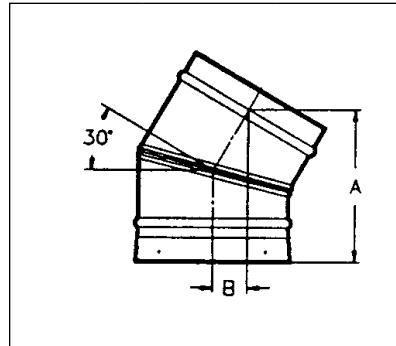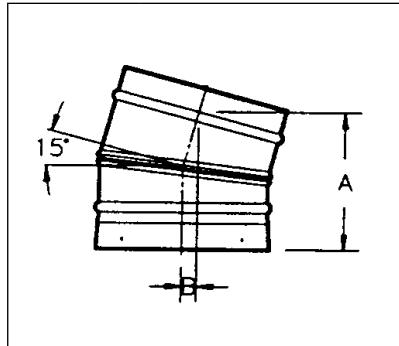

#### R.I.S. 15° Elbow Dimensions

I.D.	A	B
10"	6-7/8"	3/4"
12"	7-3/8"	7/8"
14"	7-7/8"	7/8"
16"	8-3/8"	1"
18"	8-7/8"	1"
20"	9-3/8"	1-1/8"
22"	9-7/8"	1-1/8"
24"	10-3/8"	1-1/4"

#### R.I.S. 30° Elbow Dimensions

I.D.	A	B
10"	8-1/2"	1-7/8"
12"	9"	2"
14"	9-1/2"	2-1/8"
16"	10"	2-1/4"
18"	10-1/2"	2-1/2"
20"	11"	2-5/8"
22"	11-1/2"	2-3/4"
24"	12"	2-7/8"

#### R.I.S. 45° Elbow Dimensions

I.D.	A	B
10"	9-3/8"	1-7/8"
12"	10"	2"
14"	10-3/4"	2-1/8"
16"	11-1/2"	2-1/4"
18"	12-1/4"	2-1/2"
20"	12-7/8"	2-5/8"
22"	13-1/2"	2-3/4"
24"	14-1/4"	2-7/8"

**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

Residential Insulated Stack (R.I.S.) Large Diameter Chimney



### RIS Offset Table 10" to 16"

All measurements are in inches.

Diameter	Length Between Elbows	2 X 15°		2 X 30°		2 X 45°	
		Offset	Rise	Offset	Rise	Offset	Rise
10"	No Length	1.57	11.89	3.77	14.09	6.58	15.88
	12" Length	4.35	22.28	9.15	23.40	14.18	23.48
	24" Length	7.45	33.87	15.15	33.79	22.66	31.96
	48" Length	13.67	57.05	27.15	54.58	39.63	48.93
	48" + 12"	16.45	67.43	32.52	63.88	47.23	56.53
	48" + 24"	19.55	79.03	38.52	74.28	55.72	65.02
	48" + 24" + 12"	22.34	89.41	43.90	83.59	63.32	72.62
	48" + 48"	25.77	102.21	50.52	95.06	72.69	81.99
12"	No Length	1.57	11.89	4.02	15.02	7.11	17.16
	12" Length	4.35	22.28	9.40	24.33	14.71	24.76
	24" Length	7.45	33.87	15.40	34.72	23.19	33.24
	48" Length	13.67	57.05	27.40	55.51	40.16	50.21
	48" + 12"	16.45	67.43	32.77	64.82	47.77	57.82
	48" + 24"	19.55	79.03	38.77	75.21	56.25	66.30
	48" + 24" + 12"	22.34	89.41	44.15	84.52	63.85	73.90
	48" + 48"	25.77	102.21	50.77	95.99	73.22	83.27
14"	No Length	1.70	12.88	4.27	15.95	7.81	18.86
	12" Length	4.48	23.26	9.65	25.26	15.41	26.46
	24" Length	7.58	34.85	15.65	35.66	23.90	34.95
	48" Length	13.80	58.03	27.65	56.44	40.87	51.92
	48" + 12"	16.58	68.42	33.02	65.75	48.47	59.52
	48" + 24"	19.68	80.01	39.02	76.14	56.96	68.01
	48" + 24" + 12"	22.47	90.39	44.40	85.45	64.56	75.61
	48" + 48"	25.89	103.19	51.02	96.93	73.93	84.98



Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

Residential Insulated Stack (R.I.S.) Large Diameter Chimney



### RIS Offset Table 18" to 24"

All measurements are in inches.

Diameter	Length Between Elbows	2 X 15°		2 X 30°		2 X 45°	
		Offset	Rise	Offset	Rise	Offset	Rise
18"	No Length	1.82	13.86	4.77	17.82	8.87	21.42
	12" Length	4.61	24.24	10.15	27.13	16.48	29.03
	24" Length	7.71	35.83	16.15	37.52	24.96	37.51
	48" Length	13.92	59.02	28.15	58.31	41.93	54.48
	48" + 12"	16.71	69.40	33.52	67.62	49.53	62.08
	48" + 24"	19.81	80.99	39.52	78.01	58.02	70.57
	48" + 24" + 12"	22.59	91.38	44.90	87.32	65.62	78.17
	48" + 48"	26.02	104.17	51.52	98.79	74.99	87.54
20"	No Length	1.82	13.86	5.15	19.22	9.58	23.13
	12" Length	4.61	24.24	10.52	28.53	17.18	30.73
	24" Length	7.71	35.83	16.52	38.92	25.67	39.22
	48" Length	13.92	59.02	28.52	59.71	42.64	56.19
	48" + 12"	16.71	69.40	33.90	69.02	50.27	63.79
	48" + 24"	19.81	80.99	39.90	79.41	58.73	72.28
	48" + 24" + 12"	22.59	91.38	45.27	88.72	66.33	79.88
	48" + 48"	26.02	104.17	51.90	100.19	75.70	89.25
22"	No Length	1.95	14.84	5.40	20.15	9.93	23.98
	12" Length	4.74	25.23	10.77	29.46	17.54	31.59
	24" Length	7.84	36.82	16.77	39.86	26.02	40.07
	48" Length	14.05	60.00	26.77	60.64	42.99	57.04
	48" + 12"	16.84	70.38	34.15	69.95	50.99	64.64
	48" + 24"	19.94	81.97	40.15	80.34	59.08	73.13
	48" + 24" + 12"	22.72	92.36	45.52	89.65	66.68	80.73
	48" + 48"	26.15	105.16	52.15	101.13	76.05	90.10
24"	No Length	1.95	14.84	5.65	21.09	10.64	25.69
	12" Length	4.74	25.23	11.02	30.40	18.24	33.29
	24" Length	7.84	36.82	17.02	40.79	26.73	41.78
	48" Length	14.05	60.00	29.02	61.57	43.70	58.75
	48" + 12"	16.84	70.38	34.40	70.88	51.30	66.35
	48" + 24"	19.94	81.97	40.40	81.27	59.79	74.84
	48" + 24" + 12"	22.72	92.36	45.77	90.58	67.39	82.44
	48" + 48"	26.15	105.16	52.40	102.00	76.76	91.81

**AES**

Order Online at:  
order.aes4home.com

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company



### Ultrablack FS Double Wall Black Stovepipe

Ultrablack FS (fully shielded) double wall black stovepipe requires just 6" clearance to combustible materials in all diameters-even when installed in a corner or parallel with a ceiling (Check manufacturer's clearance requirements).

Ultrablack has a smooth, clean appearance to complement any stove installation and maximize flue gas temperatures, insuring good draft when used with catalytic stoves. It's constructed of type 304 Ultra matte stainless steel, a specially designed stainless steel that is more attractive and scratch resistant when painted. Ultrablack is painted with Forrest Paint "Stove Bright" Flat Black (FP6304) premium quality high temperature stove paint. Parts are shipped wrapped in heavy paper or plastic to insure an attractive, scratch free finish.

Ultrablack assembles like a regular single wall stove pipe without complicated, unsightly twist lock connectors or spot welds, and no cutting required for installation. It easily fits most stoves, including cast iron stoves and those with oval collars and comes complete with black oxide screws and pre-drilled holes to insure safe, easy installation.

#### 7" ULTRABLACK CHIMNEY IS NON-STOCK WITH EXTENDED LEAD TIMES

**CHECK INVENTORY AT ORDER.AES4HOME.COM**

#### Ultrablack Chimney Lengths

For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	6"		7" NON-STOCK EXTENDED LEAD TIMES		8"	
		Wt.	Retail	Wt.	Retail	Wt.	Retail
ICUC__UBAF	Adjustable Length, 40" to 68" w/Trim Collar	18 lbs.	\$437.00†	18 lbs.	\$503.00*	18 lbs.	\$547.00†
ICUC__UB3F	36" Length	9 lbs.	246.00†	9 lbs.	262.00*	9 lbs.	288.00†
ICUC__UB2F	24" Length	10 lbs.	187.00	10 lbs.	226.00*	10 lbs.	250.00
ICUC__UB18F	18" Length	4 lbs.	170.00	4 lbs.	201.00*	4 lbs.	238.00
ICUC__UB1F	12" Length	3 lbs.	154.00	3 lbs.	182.00*	3 lbs.	222.00
ICUC__UB5F	5" Length	2 lbs.	89.00	2 lbs.	105.00*	2 lbs.	115.00
ICUC__UB6SF	6" Slip Section	2 lbs.	115.00	2 lbs.	133.00*	2 lbs.	159.00
ICUC__UB1SF	12" Slip Section	3 lbs.	166.00	3 lbs.	194.00*	3 lbs.	234.00
ICUC__UB18SF	18" Slip Section	5 lbs.	180.00	5 lbs.	212.00*	5 lbs.	248.00

#### Tees and Elbows

ICUE__UBT	Tee with Plug and Trim Collar	5 lbs.	\$240.00	5 lbs.	\$248.00*	5 lbs.	\$294.00
ICUE__UB30	30° Elbow	3 lbs.	133.00	3 lbs.	147.00*	3 lbs.	171.00
ICUE__UB45	45° Elbow	4 lbs.	133.00	4 lbs.	150.00*	4 lbs.	182.00
ICUE__UB90	90° Elbow	4 lbs.	187.00	4 lbs.	212.00*	4 lbs.	252.00
ICUE6UB15	15° Elbow	4 lbs.	131.00	-	-	-	-

#### Adapters

ICUM__UBM	Masonry Adapter	4 lbs.	\$135.00	4 lbs.	\$147.00*	4 lbs.	\$152.00
ICUM__UBMA	Masonry Thimble Adapter	-	133.00	-	-	-	-
ICUM__UBSE	Stove Adapter	1 lb.	42.00	1 lb.	45.00*	1 lb.	49.00
ICUM__UBD	Damper Section	1 lb.	185.00	1 lb.	212.00*	1 lb.	238.00
ICUM__UBTC	Trim Collar, Covers Crimped Edge	1 lb.	31.00	1 lb.	35.00*	1 lb.	39.00
ICUMUBI56	Increaser 5" - 6"	2 lbs.	185.00	-	-	-	-
ICUMUBI67	Increaser 6" - 7"	2 lbs.	185.00	-	-	-	-
ICUMUBI68	Increaser 6" - 8"	2 lbs.	185.00	-	-	-	-
ICUMUBI78	Increaser 7" - 8"	-	-	2 lbs.	185.00*	-	-
ICUMUBR87	Reducer 8" - 7"	-	-	-	-	2 lbs.	185.00
ICUMUBR86	Reducer 8" - 6"	-	-	-	-	2 lbs.	185.00
ICUMUBR76	Reducer 7" - 6"	-	-	2 lbs.	185.00*	-	-
ICUM86UBORF	8" - 6" Oval to Round Adapter <b>PROD. SUSPENDED</b>	-	-	-	-	4.5 lbs.	208.00
ICUM8UBORF	Oval to Round Adapter	-	-	-	-	-	204.00
ICUMLBS	Long Black Screws (100)	-	53.00	-	-	-	-
ICUMSBS	Short Black Screws (100)	-	33.00	-	-	-	-
ICUM__UBTR	Adjustable 6" Conical Trim Ring	.25 lbs.	30.00	-	-	-	37.00

## Excel Prime

### 24-Gauge Matte Black Stove Pipe

24 gauge heavy steel construction – Extra resistant to damage & long lasting use.  
 Laser Butt welded seams – Creates perfectly round lengths, making installation incredibly fast and easy.  
 Made of Satin Coat Steel – Designed to be painted for maximum paint adhesion, minimal scratches and excellent corrosion resistance.  
 New Smoke-Free Stove Bright Flat Black paint – No more smoke at start up & easy touchups.  
 Universal design - Fits any brand of Class A chimney and fits almost all stoves without an adapter.  
 5 year, No questions asked, 100% full replacement warranty.



#### 6" Lengths

Item No.	Description	Pkg.	Retail	Stocked
ICSC6SW1	6" x 12" Straight Length		\$63.00	Y
ICSC6SW18	6" x 18" Straight Length		71.00	Y
ICSC6SW1S	6" x 12" Slip Length		63.00	Y
ICSC6SW2	6" x 24" Straight Length		83.00	Y
ICSC6SW3	6" x 36" Straight Length		114.00	Y
ICSC6SW4	6" x 48" Straight Length		147.00	Y
ICSC6SWA	6" x 40" - 68" Adjustable Length		221.00	Y
ICSC6SW6S	6" x 6" Slip Length		61.00	Y

#### 6" Tees

ICSE6SWT	6" Tee w/Out Cap		\$87.00	Y
ICSE6SWTP	6" Tee Cap		56.00	Y

#### 6" Elbows

ICSE6SW45	6" x 45° Elbow		\$71.00	Y
ICSE6SWA90	6" x 90° Adjustable Elbow		150.00	Y
ICSE6SW90	6" x 90° Elbow		83.00	Y
ICSE6SW90C	6" x 90° Clean Out Elbow		164.00	Y
ICSE6SW90S	6" x 90° Slip Elbow		144.00	Y

#### 6" Heat Shields

ICSM6SW1HS	6" x 12" Heat Shield		\$56.00	Y
ICSM6SW2HS	6" x 24" Heat Shield		67.00	Y
ICSM6SW3HS	6" x 36" Heat Shield		83.00	Y
ICSM6SW45HS	6" x 45° Heat Shield		67.00	Y
ICSM6SW90HS	6" x 90° Heat Shield		83.00	Y
ICSM6SWHSS	6" Heat Shield Spacers	6	39.00	Y



45° Elbow



90° Elbow

## 7" PRIME CHIMNEY IS NON-STOCK - MADE TO ORDER

#### 7" Lengths

Item No.	Description	Pkg.	Retail	Stocked
ICSC7SW1	7" x 12" Straight Length - <b>MADE TO ORDER</b>		\$65.00	N
ICSC7SW18	7" x 18" Straight Length - <b>MADE TO ORDER</b>		77.00	N
ICSC7SW1S	7" x 12" Slip Length - <b>MADE TO ORDER</b>		65.00	N
ICSC7SW2	7" x 24" Straight Length - <b>MADE TO ORDER</b>		89.00	N
ICSC7SW3	7" x 36" Straight Length - <b>MADE TO ORDER</b>		120.00	N
ICSC7SW4	7" x 48" Straight Length - <b>MADE TO ORDER</b>		161.00	N
ICSC7SWA	7" x 40" - 68" Adjustable Length - <b>MADE TO ORDER</b>		250.00	N
ICSC7SW6S	7" x 6" Slip Length - <b>MADE TO ORDER</b>		63.00	N

#### 7" Tees

ICSE7SWT	7" Tee w/Out Cap - <b>MADE TO ORDER</b>		\$97.00	N
ICSE7SWTP	7" Tee Cap - <b>MADE TO ORDER</b>		67.00	N

7" continued on next page...



Tee Cap

**AES**

Order Online at:  
order.aes4home.com

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Excel Prime

24-Gauge Matte Black Stove Pipe

**7" PRIME CHIMNEY IS NON-STOCK - MADE TO ORDER**



Masonry Adapter



Tee



Slip Connector

### 7" Elbows

Item No.	Description	Pkg.	Retail	Stocked
ICSE7SW45	7" x 45° Elbow - <b>MADE TO ORDER</b>		\$73.00	N
ICSE7SWA90	7" x 90° Adjustable Elbow - <b>LIMITED TO STOCK ON HAND</b>		159.00	LTSD
ICSE7SW90	7" x 90° Elbow - <b>MADE TO ORDER</b>		87.00	N
ICSE7SW90C	7" x 90° Clean Out Elbow - <b>MADE TO ORDER</b>		178.00	N
ICSE7SW90S	7" x 90° Slip Elbow - <b>MADE TO ORDER</b>		152.00	N

### Heat Shields

ICSM7SW45HS	7" x 45° Heat Shield - <b>MADE TO ORDER</b>		\$67.00	N
ICSM7SW90HS	7" x 90° Heat Shield - <b>MADE TO ORDER</b>		83.00	N

### 8" Lengths

Item No.	Description	Pkg.	Retail	Stocked
ICSC8SW1	8" x 12" Straight Length		\$67.00	Y
ICSC8SW18	8" x 18" Straight Length		80.00	Y
ICSC8SW1S	8" x 12" Slip Length		67.00	Y
ICSC8SW2	8" x 24" Straight Length		97.00	Y
ICSC8SW3	8" x 36" Straight Length		130.00	Y
ICSC8SW4	8" x 48" Straight Length		175.00	Y
ICSC8SWA	8" x 40" - 68" Adjustable Length		276.00	Y
ICSC8SW6S	8" x 6" Slip Length		65.00	Y

### 8" Tees

ICSE8SWT	8" Tee w/Out Cap		\$101.00	Y
ICSE8SWTP	8" Tee Cap		80.00	Y

### 8" Elbows

ICSE8SW45	8" x 45° Elbow		\$77.00	Y
ICSE8SWA90	8" x 90° Adjustable Elbow <b>LIMITED TO STOCK ON HAND</b>		133.00	LTSD
ICSE8SW90	8" x 90° Elbow		94.00	Y
ICSE8SW90C	8" x 90° Clean Out Elbow		189.00	N
ICSE8SW90S	8" x 90° Degree Slip Elbow		161.00	N

### Heat Shields

ICSM8SW1HS	8" x 12" Heat Shield		\$67.00	Y
ICSM8SW2HS	8" x 24" Heat Shield		83.00	N
ICSM8SW3HS	8" x 36" Heat Shield		97.00	N
ICSM8SW45HS	8" x 45° Heat Shield		67.00	Y
ICSM8SW90HS	8" x 90° Heat Shield		83.00	Y
ICSM8SWHSS	8" Heat Shield Spacers	6	39.00	N

### Adapters

ICSMSWSI67	6" - 7" Increaser		\$89.00	Y
ICSMSWSR76	7" - 6" Reducer		89.00	Y
ICSMSWSI68	6" - 8" Increaser		89.00	Y
ICSM6SWM	Masonry Adapter		128.00	Y
ICSMSWSR86	8" - 6" Reducer		89.00	Y
ICSMSWSR87	8" - 7" Reducer		89.00	N
ICUM6UBTR	Adjustable 6" Conical Trim Ring		30.00	N
ICUM8UBTR	Adjustable 8" Conical Trim Ring		37.00	N



## Industrial Chimney Company

### EXCEL Pellet Vent



EXCEL Pellet is manufactured using specialized machinery which makes it possible to maintain strict tolerance between components. This ensures a quality fit and allows the factory to apply a silicone gasket. Both of which help reduce installation problems and installation time. ICC EXCEL Pellet is tested and listed to U.L. Standard 641 and designed for venting pellet stoves, pellet inserts and pellet heaters.

#### ICC EXCEL Pellet features

- Continuously welded seams leave a sleek, attractive exterior as well as ensuring a tight, leak-free fit between components.
- ICC created specialized machinery to create leak-free elbows, they don't cut corners by using their B-Vent machine.
- The factory installed and tested 100% Silicone gasket eases installation by eliminating the need to tape or silicone the joints on site, this also preserves the clean look of the system.
- Excellent Pellet to Masonry and Pellet to Class A Chimney adapters give you and your installers an alternative to BCADV.
- Each piece is pressure-tested by hand at the factory before it is shipped out, decreasing call-backs from customers with leaky venting.



**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

3" & 4" EXCEL Pellet Vent



### Lengths



For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	3"		4"	
		Wt./Cs.	Retail	Wt./Cs.	Retail
ICPC_PL1	12" Length	2 lbs.	\$70.00	2 lbs.	\$81.00
ICPC_PL16	16" Length	3 lbs.	86.00	3 lbs.	107.00
ICPC_PL2	24" Length	3 lbs.	102.00	4 lbs.	126.00
ICPC_PL3	36" Length	4 lbs.	130.00	6 lbs.	161.00
ICPC_PL4	48" Length	6 lbs.	161.00	8 lbs.	186.00
ICPC_PL5	5" Length	1 lb.	59.00	2 lbs.	65.00
ICPC_PC0L	12" Clean Out Length	2 lbs.	142.00	2 lbs.	154.00
ICPC_PLA6	8" Adjustable Length (1 3/4" - 6" Installed)	2 lbs.	84.00	2 lbs.	103.00
ICPC_PLA16	16" Adjustable Length (1 3/4" - 14" Installed)	3 lbs.	124.00	4 lbs.	150.00

### Tees and Elbows

Item No.	Description	3"		4"	
		Wt./Cs.	Retail	Wt./Cs.	Retail
ICPE_PE45	45 Degree Elbow	1 lb.	\$112.00	1 lb.	\$126.00
ICPE_PE90	90 Degree Elbow	2 lbs.	140.00	2 lbs.	175.00
ICPE_PCOE	90 Degree Clean Out Elbow	2 lbs.	256.00	2 lbs.	268.00
ICPE_PT	Tee w/Cap	2 lbs.	210.00	3 lbs.	261.00
ICPE_PCOT	Clean Out tee w/Cap	2 lbs.	375.00	3 lbs.	403.00
ICPE3PT4	Tee w/Cap & 3" Mouth	-	-	3 lbs.	236.00
ICPE3PE90S	Slip Elbow	-	198.00	-	-
ICPE_PTC1	Tee Cap w/Bolt	-	53.00	-	67.00

### Accessories

Item No.	Description	3"		4"	
		Wt./Cs.	Retail	Wt./Cs.	Retail
ICPF_PF	Flat Flashing with Storm Collar	2 lbs.	\$60.00	2 lbs.	\$72.00
ICPM_PCA	Type A Adapter Cap	-	152.00	-	152.00
ICXMEVT	Vinyl Siding Trim	1.5 lbs.	26.00	-	-
ICPM_PAF5	Flex Adapter - Connect 3" or 4" EXCELPellet to a 5" Flex Liner	-	112.00	-	116.00
ICPM_PAF55	Flex Adapter - Connect 3" or 4" EXCELPellet to a 5.5" Flex Liner	-	116.00	-	119.00
ICPM_PAF6	Flex Adapter - Connect 3" or 4" EXCELPellet to a 6" Flex Liner	-	121.00	-	126.00
ICPF3MFB	3" Metal Roof Flashing Adapter 8/12-12/12	-	45.00	-	-
ICPM_PAX6	6" Type A Chimney Reline Adapter - 3" or 4"	-	140.00	-	150.00
ICPM_PAX7	7" Type A Chimney Reline Adapter - 3" or 4"	-	150.00	-	164.00
ICPM_PAX8	8" Type A Chimney Reline Adapter - 3" or 4"	-	170.00	-	175.00



Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

3" & 4" EXCEL Black Pellet Vent



### Lengths - Black

 For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	3"		4"	
		Wt./Cs.	Retail	Wt./Cs.	Retail
ICPC_PL1B	12" Length - Black	-	\$88.00	-	\$102.00
ICPC_PL2B	24" Length - Black	-	124.00	-	160.00
ICPC_PL3B	36" Length - Black	-	150.00	-	186.00
ICPC_PL4B	48" Length - Black	-	182.00	-	224.00
ICPC_PL5B	5" Length - Black	-	75.00	-	84.00
ICPC_PL16B	16" Length Black	3 lbs.	107.00	3 lbs.	130.00
ICPC_PLA16B	16" Slip Length - Black	-	156.00	-	186.00
ICPC_PLA6B	8" Slip Length - Black	-	107.00	-	131.00

### Tees and Elbows - Black

Item No.	Description	3"		4"	
		Wt./Cs.	Retail	Wt./Cs.	Retail
ICPE_PE45B	45 Degree Elbow - Black	-	\$124.00	-	\$140.00
ICPE_PE90B	90 Degree Elbow - Black	-	154.00	-	194.00
ICPE_PE90SB	Slip Elbow - Black	-	234.00	-	287.00
ICPE3PT4B	3-4 Inreater Tee w/Cap - Black	-	285.00	-	-
ICPE_PTB	Tee w/Cap - Black	-	236.00	-	287.00
ICPE_PTC1	Tee Cap	-	53.00	-	67.00

### Accessories- Black

ICPF4MFA	Metal Roof Flashing Adapter 1/12 - 7/12	-	-	-	\$42.00
ICPF_MFB	Pellet AND Gas Metal Roof Flashing Adapter 8/12 - 12/12	3 lbs.	45.00	3 lbs.	47.00
ICPM_PASB	Stove Adapter - Black	-	59.00	-	70.00*
ICPM3PAT4B	3-4" Stove Adapter Tee - Black	-	291.00	-	-
ICPM3PIT4B	3-4" Tapered Stove Adapter - Black	-	161.00	-	-
ICPM_PWTOC	Wall Thimble w/Outside Air Channel	-	823.00	-	823.00
ICMPSSS	Zinc Screws for Pellet (100 ea)	-	21.00	-	-

**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX



## Accessories



For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	3"		4"	
		Wt./Cs.	Retail	Wt./Cs.	Retail
ICPF_PFA	1/12-7/12 Flashing w/Storm Collar	3 lbs.	\$72.00	3 lbs.	\$76.00
ICPF_PFB	8/12-12/12 Flashing w/Storm Collar	3 lbs.	76.00	3 lbs.	83.00
ICPM3PAA5	5" Type A Chimney Adapter	-	156.00	-	-
ICPM_PAA6	6" Class A Chimney Adapter	1 lb.	140.00	1 lb.	150.00
ICPM_PAA7	7" Class A Chimney Adapter	1 lb.	150.00	1 lb.	164.00
ICPM_PAA8	8" Class A Chimney Adapter	1 lb.	170.00	1 lb.	175.00
ICPM_PAQ	Quick Disconnect Adapter	1 lb.	112.00	1 lb.	117.00
ICPM_PAL5	__" x 5" Liner Adapter	1 lb.	84.00	1 lb.	84.00
ICPM_PAM	Masonry Adapter	3 lbs.	168.00	1 lb.	182.00
ICPM_PAS	Stove Adapter	1 lb.	45.00	1 lb.	53.00
ICPM_PCH	Horizontal Cap	2 lbs.	110.00	2 lbs.	117.00
ICPM_PCJ	Adjustable Jet Cap	2 lbs.	116.00	2 lbs.	126.00
ICPM_PCR	Vertical Rain Cap	2 lbs.	140.00	2 lbs.	144.00
ICPM_PCE	Economy Cap	1 lb.	53.00	1 lb.	61.00
ICPM_PCS	Spark Screen	1 lb.	74.00	1 lb.	74.00
ICPM_PSA	Ceiling Support/Radiation Shield	5 lbs.	156.00	6 lbs.	178.00
ICPM_PSC	Storm Collar	1 lb.	27.00	1 lb.	31.00
ICPM_PSG	Silicone Gasket	1 lb.	N/C	1 lb.	N/C
ICPM_PSS	Square Support/Radiation Shield	8 lbs.	212.00	8 lbs.	233.00
ICPM_PWT	Adjustable Wall Thimble	5 lbs.	166.00	5 lbs.	178.00
ICPM_PWTE	Wall Thimble Extension	4 lbs.	112.00	4 lbs.	138.00*
ICPM3PWTOC	Wall Thimble with Outside Air	9 lbs.	823.00	-	-
ICPM_PWTOI	Wall Thimble Integrated	5 lbs.	353.00	6 lbs.	353.00
ICPM4PCT	4" Traditional Coaxial	-	-	3 lbs.	431.00
ICPM_PFG	Flat Gasket	1 lb.	N/C	1 lb.	N/C
ICPM3PAT3	3" Stove Adapter Tee, Galvalume	2 lbs.	206.00	-	-
ICPM3PAT3B	3" Stove Adapter Tee, Black	2 lbs.	224.00*	-	-
ICPM3PAT4	3" to 4" Stove Adapter Tee	3 lbs.	240.00	-	-
ICPM3PI4	3"-4" Tapered Stove Adapter	1 lb.	144.00	-	-
ICPM3PAF4	3" - 4" Flex Adapter	1 lb.	133.00	-	-
ICPM4PATF4	4" Flex Adapter Tee	-	-	1 lb.	142.00
ICPM3PATF4	3" - 4" Flex Adapter Tee	1 lb.	130.00	-	-
ICPM3PIT4	3" - 4" Tapered Increaser, Galvalume	1 lb.	133.00	-	-
ICPM3PIT4B	3" - 4" Tapered Increaser, Black	1 lb.	161.00*	-	-
ICPMPPRCW	3" & 4" Wind/Rain Shield	1 lb.	70.00	-	-
ICPMPSW	3" & 4" Adjustable Wall Support	2 lbs.	51.00	-	-
ICPMPTMP	3" & 4" Template	1 lb.	44.00	-	-
ICPM3PASH	Harman Stove Adapter	3 lbs.	51.00	-	-
ICPM3PASH6	Harman 6" Stove Adapter	4 lbs.	74.00	-	-
ICPMHG	Harman Style Gasket - For Use w/Harman Stove Adapter	1 lb.	23.00	-	-



Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

### EXCELiner Rigid Liner



EXCELiner is designed and approved to replace clay tile liners which have become cracked from age, misuse or damaged by chimney fires. EXCELiner can be used to reline masonry chimneys which have deteriorated due to chimney fires, spalled tiles, moisture damage or eroded mortar joints.

By reducing the chimney to the correct size for the appliance, EXCELiner improves draft, reduces fuel consumption and helps insure consistent operation. There is less creosote formation in a properly sized flue which decreases the probability of a chimney fire.

EXCELiner is listed to UL and ULC standards by Warnock Hersey Professional Services to be used as stainless steel liner in a new chimney, instead of a clay tile liner. Unlike clay tile liners, EXCELiner can withstand chimney fires without damage and comes with a lifetime warranty.

EXCELiner has continuous welded seams which means no leaks and no possibility of seam separation. All stainless steel components are made of type 304 stainless steel with factory hemmed ends for smooth, safe surfaces. No drilling is required. EXCELiner comes with pre-punched holes and all stainless steel rivets provided with each liner section.

To order, enter the appropriate chimney diameter size into the item number.

#### Chimney Lengths



For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	5"	5.5"	6"	7"	8"
ICLC_LL4	48" Length	\$147.00	\$147.00*	\$147.00	\$170.00	\$196.00
ICLC_LL3	36" Length	126.00	126.00*	126.00	145.00	168.00
ICLC_LL2	24" Length	106.00	106.00*	106.00	132.00	145.00
ICLC_LL1	12" Length	62.00	62.00*	62.00	73.00	89.00
ICLC_LLA1	12" Adjustable Length	62.00*	62.00*	62.00	73.00	89.00
ICLC_LLA3	36" Adjustable Length	126.00*	126.00*	126.00	145.00	168.00

#### Tees and Elbows

ICLE_LT	90° Split Base Tee w/out Tee Cap	\$134.00*	\$143.00*	\$143.00	\$150.00	\$161.00
ICLE_LTA	Adjustable Snout Tee w/out Tee Cap	183.00*	192.00*	192.00	200.00	215.00
ICLE_LTC	Tee Cap	43.00*	49.00	49.00	51.00	64.00
ICLE_LE30	30° Elbow	83.00*	91.00*	91.00	98.00	113.00
ICLE_LE45	45° Elbow	96.00*	98.00*	98.00	111.00	126.00
ICLE_LE90	90° Elbow	115.00*	119.00*	119.00	134.00	152.00
ICLE_LEA90	90° Adjustable Elbow	137.00*	137.00*	137.00	152.00	174.00
ICLE_LTL	Twist Lock Tee	185.00*	189.00*	196.00*	209.00*	231.00*
ICLM6LAF5	Appliance Adapter - 6" Flue to 5" Flex	-	-	83.00	-	-
ICLM6LAF55	Appliance Adapter - 6" Flue to 5.5" Flex	-	-	83.00	-	-

#### Supports

ICLM LSB	Galvanized Base Support w/Storm Collar	\$119.00*	\$119.00*	\$119.00*	\$119.00	\$119.00
ICLM LSA	Stainless Top Support 16" x 16" w/Storm Collar	224.00*	231.00*	231.00	245.00	253.00
ICLM LSAL	Stainless Top Support 24" x 24" w/Storm Collar	299.00*	312.00*	312.00	328.00	339.00
ICLM LSAG	Galvanized Top Support 16" x 16" w/Storm Collar	130.00*	137.00*	137.00	145.00	159.00
ICLM LSAGL	Galvanized Top Support 24" x 24" w/Storm Collar	224.00*	231.00*	231.00	245.00	253.00*

**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

EXCELiner Rigid Liner



### Caps and Adapters



For stock status, please visit [order.aes4home.com](http://order.aes4home.com) or call 800-682-9722

Item No.	Description	5"	5.5"	6"	7"	8"
ICLM_LSASC	Storm Collar	\$45.00	-	\$49.00	\$51.00	\$60.00
ICLM_LCR	Regular Rain Cap	113.00*	121.00	121.00	126.00	134.00
ICLM_LCD	Deluxe Rain Cap	143.00*	152.00	152.00	177.00	185.00
ICLM_LAF	Flex Liner Adapter	80.00*	83.00	83.00	91.00	104.00
ICLM_LAF90	90° Adjustable Flex Adapter	179.00*	179.00	179.00	198.00	228.00
ICLM_I TH	Insulated Thimble	454.00*	-	454.00	494.00	531.00
ICLMLR65	Reducer 6" - 5"	106.00*	-	-	-	-
ICLMLR76	Reducer 7" - 6"	119.00*	-	-	-	-
ICLMLR87	Reducer 8" - 7"	130.00*	-	-	-	-
ICLMLI56	Increaser 5" - 6"	106.00*	-	-	-	-
ICLMLI67	Increaser 6" - 7"	119.00*	-	-	-	-
ICLMLI78	Increaser 7" - 8"	130.00*	-	-	-	-



Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

EXCEL Direct Vent



### Construction/Performance

EXCEL Direct features a stainless steel flue and satin coat outer casing. Both the flue and casing are continuously laser welded insuring they are always perfectly round. The precision tapered coupling system is formed directly onto the male and female end of each tube.

This precision coupling system, combined with precision laser welded construction enables EXCEL Direct to accomplish two important performance objectives:

- The EXCEL Direct system is the most airtight, leak-free system in the industry.
- The EXCEL Direct system is the fastest and easiest system to install.

The lengths fit together effortlessly and are fastened with three small screws through pre-punched holes.

### Terminations

There are three different terminations (two horizontal, one vertical), plus snorkel options. These terminations are sufficient to do any installation and cut down on SKU's. Builders and homeowners have told us they don't want to emphasize terminations, they want them to disappear. Our terminations are attractive, perform as well or better than the other guys in all wind conditions and can be painted to match the house. A slip section is integrated into every horizontal termination.

### Appearance

The tapered coupling system, combined with laser welded lengths provide a clean smooth appearance to the galvalume exterior.

Laser welding, smooth couplings and the high quality Forrest Paint finish provide an unmatched appearance to our black painted components making it the ideal choice for freestanding applications.

### Appliance Compatibility

EXCEL Direct has been designed to fit all appliance using 4/6 and 5/7 diameter vents including those which come with DuraVent adapters factory installed.

EXCEL Direct is tested to UL 2112 Standards.



Type A Chimney Adapter



Insulated Wall Thimble



Flex Liner Connector



Ceiling Support/Firestop



Galvalume Pipe Length



Coaxial to Colinear Adapter



Black 45°/90° Elbows



Vertical Termination



Snorkel Termination

**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

**4" EXCEL Direct**  
 (4" I.D. - 6 1/2" O.D.)



**4" Galvanized Lengths and Elbows**

Item No.	Description	Wt./Cs.	Retail	Stocked
ICTC4DL6	6" Galvalume Length	2 lbs.	\$59.00	Y
ICTC4DL9	9" Galvalume Length		65.00	Y
ICTC4DL1	12" Galvalume Length	3 lbs.	75.00	Y
ICTC4DL2	24" Galvalume Length	4 lbs.	102.00	Y
ICTC4DL3	36' Galvalume Length		127.00	Y
ICTC4DL4	48" Galvalume Length	8 lbs.	147.00	Y
ICTC4DLA30	18"-30" Adjustable Length		134.00	Y
ICTC4DLS1	12" Galvalume Slip Length		75.00	Y
ICTC4DLS2	24" Galvalume Slip Length		102.00	Y
ICTE4DE45	Galvalume 45° Elbow	3 lbs.	100.00	Y
ICTE4DE90	Galvalume 90° Elbow	3 lbs.	120.00	Y



Deluxe Horizontal Termination



Trim Ring



Adjustable Flashing



Square Support/Radiation Shield



Offset Support



Galvalume 45°/90° Elbows



Masonry Chimney Flashing

**4" Black Lengths and Elbows**

Item No.	Description	Wt./Cs.	Retail	Stocked
ICTC4DL6B	6" Black Length	2 lbs.	\$100.00	Y
ICTC4DL1B	12" Black Length	3 lbs.	111.00	Y
ICTC4DL2B	24" Black Length	4 lbs.	143.00	Y
ICTC4DL3B	36' Black Length		177.00	Y
ICTC4DL4B	48" Black Length	9 lbs.	209.00	Y
ICTC4DLA30B	18"-30" Adjustable Black Length		202.00	Y
ICTC4DLS1B	12" Black Slip Length		111.00	Y
ICTC4DLS2B	24" Black Slip Length		143.00	Y
ICTE4DE45B	Black 45° Elbow	3 lbs.	131.00	Y
ICTE4DE90B	Black 90° Elbow	3 lbs.	154.00	Y
ICTE4DE90S	90° Slip Elbow		166.00	Y
ICTE4DE90SB	Black 90° Slip Elbow		222.00	Y

**4" Supports and Firestops**

Item No.	Description	Wt./Cs.	Retail	Stocked
ICTM4SS	Square Support/Radiation Shield	13 lbs.	\$248.00	Y
ICTM4RDS	Round Support/Radiation Shield	8 lbs.	205.00	Y
ICTM4CS	Ceiling Support/Firestop	2 lbs.	67.00	Y
ICTM4WT	Insulated Wall Thimble (Can be Used in 2x4 Wall)	6 lbs.	138.00	Y
ICTM4AS	Attic Radiation Shield/Firestop	7 lbs.	179.00	Y
ICTM4HTK	Horizontal Termination Kit		879.00	Y
ICTM4TP	4 DV Trim Plate Black		36.00	Y
ICTM4WTE	4 DV Wall Thimble Extension		131.00	Y
ICTMWS	4" & 5" Adjustable Wall Support	2 lbs.	48.00	Y
ICTMOS	4" & 5" Offset Support	1 lb.	38.00	Y
ICTM4TR	Black Round Trim Ring	4 lbs.	45.00	Y



Galvalume 45°/90° Elbows



Masonry Chimney Flashing



Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

4" EXCEL Direct - (4" I.D. - 6 1/2" O.D.)

### 4" Caps, Flashings and Adapters

Item No.	Description	Wt./Cs.	Retail	Stocked
ICTM4OR	O Ring		\$11.00	N
ICPM4PCT	4" Traditional Coaxial Chimney Cap		431.00	N
ICTMCT3	DV Traditional Co-Linear Chimney Cap - 3 x 3 - Traditional Caps Require a Flashing (ICTFCTF or ICTFCTFC, shown on this page)		370.00	Y
ICTMCT4	DV Traditional Co-Linear Chimney Cap - 4 x 3 - Traditional Caps Require a Flashing (ICTFCTF or ICTFCTFC, shown on this page)	8 lbs.	370.00	Y
ICTM4SVT	Small Vertical Termination - Stainless Steel		227.00	Y
ICTM4HT	Horizontal Termination w/5" Adj.	8 lbs.	327.00	Y
ICTM4RHT	4" Round Horizontal Termination Cap		399.00	Y
ICTM4DHT	Deluxe Horizontal Termination w/5" Adj.	9 lbs.	399.00	LTSD
ICTM4ST14	14" Snorkel Termination	18 lbs.	1,085.00	Y
ICTM4SVTS	Rain/Wind Shield for SVT		111.00	Y
ICTM4ST36	36" Snorkel Termination	25 lbs.	1,251.00	Y
ICTMIVT	4" & 5" Insert Vertical Termination (ICTF4MF required)	5 lbs.	347.00	Y
ICTMIVTP	Prefab Chimney Top Adapter		102.00	Y
ICTF4F	Flat Flashing	3 lbs.	131.00	Y
ICTF4FA	Adjustable Flashing 1/12 - 6/12	3 lbs.	104.00	Y
ICTF4FB	Adjustable Flashing 7/12 - 12/12	4 lbs.	156.00	Y
ICTFCTF	Universal Flashing - Rectangular Opening		57.00	Y
ICTFMFR	Universal Flashing - Round Opening		57.00	Y
ICTFCTFC	Clay Tile Flashing - Rectangular Opening		79.00	Y
ICTFMFC	Clay Tile Flashing - Round Opening		79.00	Y
ICTMHC	Hose Clamp Bracket - Use w/Clay Tile Flashing		57.00	Y
ICTF4MF	Masonry Chimney Flashing	1 lb.	111.00	Y
ICTMSC	4" & 5" Storm Collar	2 lbs.	27.00	Y
ICTM4RD	Restrictor Disk	1 lb.	16.00	Y
ICTMVSS	4" & 5" Vinyl Siding Standoff	3 lbs.	111.00	Y
ICTM4CAA	4" Coaxial to Colinear Appliance Adapter	3 lbs.	322.00	Y
ICTM4CA6	4" x 6" Type A Chimney Adapter	4 lbs.	422.00	Y
ICTM4CA7	4" x 7" Type A Chimney Adapter	4 lbs.	422.00	Y
ICTM4CA8	4" x 8" Type A Chimney Adapter	4 lbs.	422.00	Y
ICTMCFAA3	4" & 5" Flex Liner Connector 3"	1 lb.	75.00	Y
ICTM4AA1	4" Vermont Castings Adapter	1 lb.	98.00	Y
ICTM4AA2	4" Valor Adapter	1 lb.	77.00	Y
ICTM4AA3	4" Napoleon Adapter	1 lb.	90.00	Y
ICTM4AA4	4" Kingsman Adapter	1 lb.	215.00	LTSD
ICTM4AA6	4" Archgard Adapter	1 lb.	77.00	Y
ICTM4AA7	4" x 7" Regency Adapter	1 lb.	86.00	Y
ICTMCTS	4" & 5" Wind/Rain Shield - Traditional Caps		114.00	Y
ICTMCFAA4	Flex Liner Connector - 4"		79.00	Y
ICTM4CFA	4" x 7" Enviro Coaxial Flex Adapter - Flex not Included		262.00	Y
ICUM6UBTR	Adjustable 6" Conical Trim Ring		30.00	Y
ICUM8UBTR	Adjustable 8" Conical Trim Ring		37.00	Y



Round Support/Radia-  
tion Shield



Black Pipe Length



Horizontal Termination



Attic Radiation Shield



Adjustable Wall Sup-  
port



Storm Collar

**AES**

Order Online at:  
order.aes4home.com

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

5" EXCEL Direct - (5" I.D. - 7 7/8" O.D.)



### 5" Galvanized Lengths and Elbows

Item No.	Description	Wt./Cs.	Retail	Stocked
ICTC5DL6	6" Galvalume Length	2 lbs.	\$67.00	Y
ICTC5DL9	9" Galvalume Length	2 lbs.	77.00	Y
ICTC5DL1	12" Galvalume Length	3 lbs.	88.00	Y
ICTC5DL2	24" Galvalume Length	5 lbs.	120.00	Y
ICTC5DL3	36" Galvalume Length		154.00	Y
ICTC5DL4	48" Galvalume Length	10 lbs.	174.00	Y
ICTC5DLS1	12" Galvalume Slip Length		88.00	Y
ICTC5DLS2	24" Galvalume Slip Length		120.00	Y
ICTC5DLA30	18"-30" Adjustable Galvalume Length		166.00	Y
ICTE5DE45	Galvalume 45° Elbow	3 lbs.	123.00	Y
ICTE5DE90	Galvalume 90° Elbow	4 lbs.	143.00	Y

### 5" Black Lengths and Elbows

ICTC5DL6B	6" Black Length	2 lbs.	\$116.00	Y
ICTC5DL9B	9" Black Length	2 lbs.	116.00	Y
ICTC5DL1B	12" Black Length	3 lbs.	127.00	Y
ICTC5DL2B	24" Black Length	6 lbs.	168.00	Y
ICTC5DL3B	36" Black Length		205.00	Y
ICTC5DL4B	48" Black Length	11 lbs.	242.00	Y
ICTC5DLA30B	18"-30" Adjustable Black Length		246.00	Y
ICTC5DLS1B	12" Black Slip Length		127.00	Y
ICTC5DLS2B	24" Black Slip Length		168.00	Y
ICTE5DE45B	Black 45° Elbow	3 lbs.	179.00	Y
ICTE5DE90B	Black 90° Elbow	4 lbs.	211.00	Y
ICTM5AA6	Adapter 5" x 8" - Montigo		77.00	Y
ICTM5TA1	Termination Adapter - Montigo		71.00	Y

### 5" Supports and Firestops

ICTM5SS	Square Support/Radiation Shield	16 lbs.	\$286.00	Y
ICTM5RDS	Round Support/Radiation Shield	9 lbs.	252.00	Y
ICTM5CS	Ceiling Support/Firestop	3 lbs.	77.00	Y
ICTM5WT	Insulated Wall Thimble (Can be Used in 2x4 Wall)	6 lbs.	180.00	Y
ICTM5WTE	Wall Thimble Extension		150.00	Y
ICTM5AS	Attic Radiation Shield/Firestop	7 lbs.	222.00	Y
ICTMWS	4" & 5" Adjustable Wall Support	2 lbs.	48.00	Y
ICTMOS	4" & 5" Offset Support	1 lb.	38.00	Y
ICTM5TR	Black Trim Ring	4 lbs.	54.00	Y
ICTM5TP	Black Trim Plate		38.00	Y

### 5x8 Flashings

ICXF6EF	Flat 2/12 Pitch		\$160.00	N
ICXF6EFA	1/12 - 7/12 Pitch		160.00	N
ICXF6EFB	8/12 - 12/12 Pitch		170.00	N

**AES**

Order Online at:  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Industrial Chimney Company

5" EXCEL Direct - (5" I.D. - 7 7/8" O.D.)

### 5" Caps, Flashings and Adapters

Item No.	Description	Wt./Cs.	Retail	Stocked
ICTM5SVT	Small Vertical Termination - Stainless Steel		\$290.00	Y
ICTM5HT	Horizontal Termination w/5" Adj.	9 lbs.	413.00	Y
ICTM5RHT	Round Horizontal Termination		458.00	N
ICTM5ST36	36" Snorkel Termination	25 lbs.	1,373.00	Y
ICTMIVT	4" & 5" Insert Vertical Termination	5 lbs.	347.00	Y
ICXF6EF	Flat Flashing	6 lbs.	160.00	Y
ICXF6EFA	Adjustable Flashing 1/12 - 6/12	6 lbs.	160.00	Y
ICXF6EFB	Adjustable Flashing 7/12 - 12/12	8 lbs.	170.00	Y
ICTMSC	4" & 5" Storm Collar	2 lbs.	27.00	Y
ICTMSQSC	4" & 5" Storm Collar for Square Support	2 lbs.	34.00	Y
ICTMCFAA3	4" & 5" Flex Liner Connector 3"	1 lb.	75.00	Y
ICTMVSS	4" & 5" Vinyl Siding Standoff	3 lbs.	111.00	Y
ICTMR54	Direct Vent 5"-4" Reducer		133.00	Y
ICTMMA	Masonry Adapter		191.00	Y
ICTMMTA	Masonry Termination Adapter		154.00	Y
ICTMCTA	Co-Linear Termination Adapter		279.00	Y
ICTM5AA1	5" Kingsman Adapter		154.00	Y
ICTM5AA3	5" x 8" Regency Adapter		88.00	Y
ICTM5AA4	5" x 4" Regency Adapter		79.00	N
ICTMCTS	4" & 5" Wind/Rain Shield - Traditional Caps		114.00	Y
ICTM5CFA	5" x 8" Enviro Coaxial Flex Adapter		278.00	Y
ICTM5AA7	5" x 7" Regency Adapter	1 lb.	54.00	N
ICTM5AA8	5"x8" Faber Adapter	1.3 lbs.	88.00	N

### Flex Kits

ICTMALK33	Standard 3" x 3" Co-Linear Flex Kit - Includes (x2) 35ft Lengths, S/S Round High Wind Cap, S/S Flashing		\$674.00	Y
ICTMALK43	Standard 4" x 3" Co-Linear Flex Kit - Includes (x2) 35ft Lengths, S/S Round High Wind Cap, S/S Flashing		711.00	Y
ICTMALT33	Traditional 3" x 3" Co-Linear Flex Kit - Includes (x2) 35ft Lengths, S/S Rectangular Cap, Galvalume Flashing		674.00	Y
ICTMALT43	Traditional 4" x 3" Co-Linear Flex Kit - Includes (x2) 35ft Lengths, S/S Rectangular Cap, Galvalume Flashing		711.00	Y
ICTMALC4	Masonry Chimney Conversion Kit		674.00	Y
ICTC3AL35	3" x 35' Aluminum Flex Roll		240.00	Y
ICTC4AL35	4" x 35' Aluminum Flex Roll		347.00	Y
ICTC3AL50	3" x 50' Aluminum Flex Roll		390.00	Y
ICTC4AL50	4" x 50' Aluminum Flex Roll		543.00	Y
ICTMALH	Horizontal Vent Kit - Includes Two 5' Lengths of 3" Flex, Four Hose Clamps and a Firestop/Template for the Wall - Compatible with Enviro Q1 Gas Insert Glass and Log Models		418.00	Y



Deluxe Horizontal Termination



Trim Ring



Adjustable Flashing



Square Support/Radiation Shield



Offset Support



Galvalume 45°/90° Elbows



Masonry Chimney Flashing

**AES**

Order Online at:  
order.aes4home.com

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX





## Industrial Chimney Company

Excel Direct Power Vent (3x5)



**EXCEL Direct Power Vent** is the essential solution to pressurized direct vent systems. Ideal for direct vent appliances with a power termination or in-line fan. It is listed to a higher temperature rating than other brands and has the tightest seals on the market.

No taping of joints or sealants are required, and it arrives clean without lubricant on the gaskets. Just fast, easy, clean assembly.

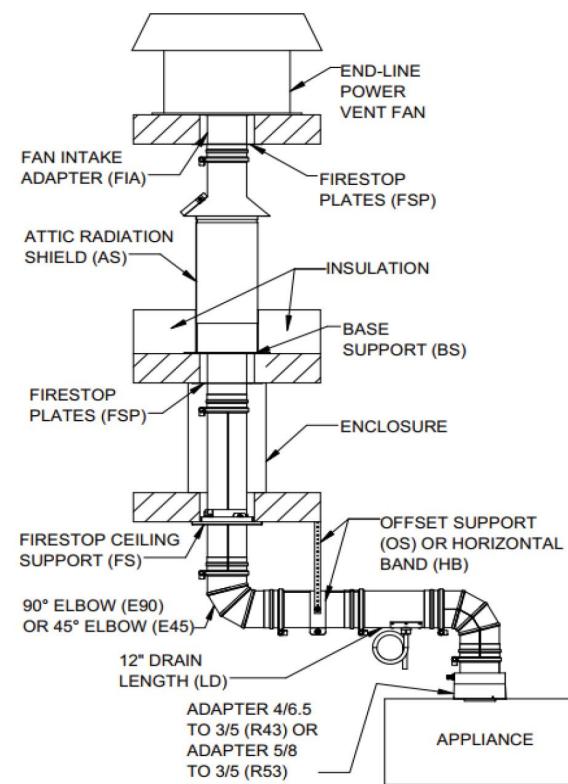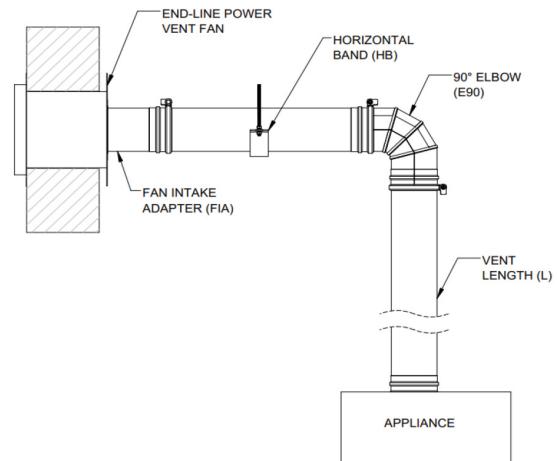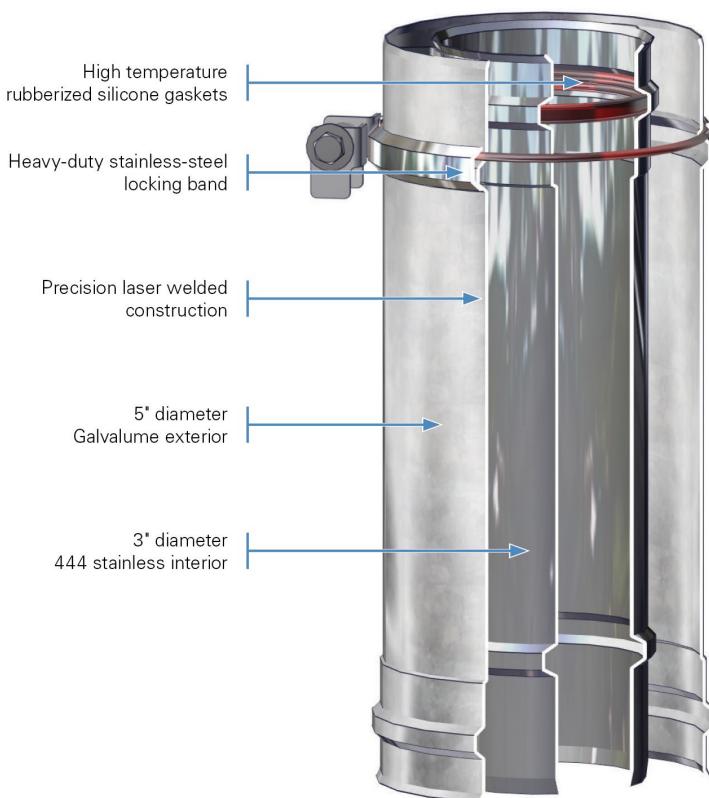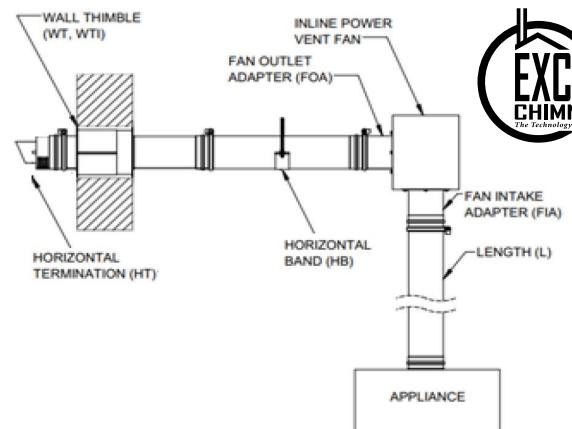



## Industrial Chimney Company

Excel Direct Power Vent (3x5)



**OR** Symbol means required components for Ortal Fireplaces installations.

All required components are specific to a particular venting configuration - either **Flush Mount** or **Inline**. See next pages for detailed "steps" and images for additional help.

### Power Vent Lengths

Item No.	Description	Wt./Cs.	Retail	Stocked
ICTU35DPL6	6" Length	-	\$79.00	-
ICTU35DPL1	12" Length	-	112.00	-
ICTU35DPL2	24" Length	-	125.00	-
ICTU35DPL3	36" Length	-	151.00	-
ICTU35DPL4	48" Length	-	177.00	-
ICTU35DPLD	12" Length with drain	-	254.00	-
ICTU35DPLS1	12" Slip Length	-	138.00	-
ICTU35DPLS2	24" Slip Length	-	196.00	-

### Power Vent Elbows

ICTV35DPE30	Elbow 30°	-	\$164.00	-
ICTV35DPE45	Elbow 45°	-	170.00	-
ICTV35DPE90	Elbow 90°	-	187.00	-

### Power Vent Supports & Firestops


ICTX35DPWT	Wall Thimble	-	\$164.00	-
ICTX35DPWTI	Insulated Wall Thimble	-	228.00	-
ICTX35DPFS	Firestop Ceiling Support	-	79.00	-
ICTX35DPFSP	Firestop Plates	-	24.00	-
ICTX35DPBS	Base Support	-	99.00	-
ICTX35DPWS	Wall Support	-	92.00	-
ICTX35DPOS	Offset Support	-	40.00	-
ICTX35DPSR	Roof Support	-	73.00	-
ICTX35DPHB	Horizontal Band	-	30.00	-
ICTX35DPAS	Attic Radiation Shield	-	164.00	-

### Power Vent Terminations

ICTX35DPHT	<b>OR</b>	Horizontal Termination (Ref# on Guide - D1)	-	\$144.00	-
ICTX35DPVT	<b>OR</b>	Vertical Termination (Ref# on Guide - D2)	-	164.00	-

Example (right)

Complete Ortal Components  
Guide on Following Pages

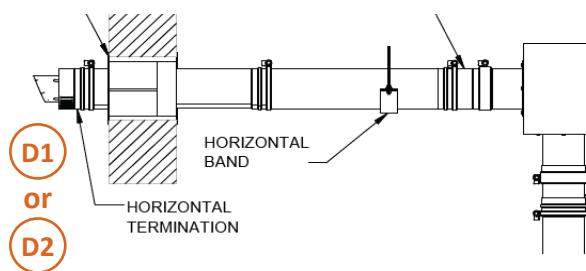

**AES**

**Order Online at:**  
[order.aes4home.com](http://order.aes4home.com)

Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX



## Industrial Chimney Company

Excel Direct Power Vent (3x5)



### Power Vent Flashings and Collars

Item No.	Description	Wt./Cs.	Retail	Stocked
ICTW35DPF	Flat Flashing	-	\$73.00	-
ICTW35DPFA	Flat Flashing 1/12-7/12	-	73.00	-
ICTW35DPFB	Flat Flashing 8/12-12/12	-	79.00	-
ICTW35DPSC	Storm Collar	-	24.00	-


### Power Vent Accessories

ICTX35DPR43	<b>OR</b>	Appliance Adapter 4/6.5 to 3/5 ( <a href="#">Ref# on Guide - A1</a> )	-	\$144.00	-
ICTX35DPR53	<b>OR</b>	Appliance Adapter 5/8 to 3/5 ( <a href="#">Ref# on Guide - A2</a> )	-	177.00	-
ICTX35DPFAD	<b>OR</b>	Universal Female Fan Adapter ( <a href="#">Ref# on Guide - B1</a> )	-	118.00	-
ICTX35DPFIA	<b>OR</b>	Fan Intake Adapter ( <a href="#">Ref# on Guide - B2</a> )	-	99.00	-
ICTX35DPMAD	<b>OR</b>	Universal Male Adapter ( <a href="#">Ref# on Guide - C1</a> )	-	131.00	-
ICTX35DPFOA	<b>OR</b>	Fan Outlet Adapter ( <a href="#">Ref# on Guide - C2</a> )	-	112.00	-
ICTX35DPLB		Locking Band	-	21.00	-

**OR** Symbol means required components for Ortal Fireplaces installations.

All required components are specific to a particular venting configuration - either **Flush Mount** or **Inline**. See next pages for detailed "steps" and images for additional help.

*Example (right)*  
**Complete Ortal Components**  
 Guide on Following Pages

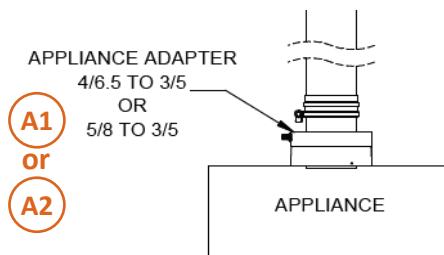




# EXCELDirect Power Vent®

## Required Components For Ortal Fireplaces

### Flush Mount and Vertical Power Vent Installations

Part code	Part name	Description	Visual
<b>1. Choose the appliance adapter required</b>			
<b>A1</b> TX-35DPR43	Appliance adapter 4x6 5/8	Use the DPR43 to connect to appliances with a 4" x 6 5/8" flue collar	
	or		
<b>A2</b> TX-35DPR53	Appliance adapter 5/8	Use the DPR53 to connect to appliances with a 5" x 8" flue collar	
<b>2. Fan Adapter Required</b>			
<b>B1</b> TX-35DPFAD	ICC/CVS Female adapter	An adapter is required to transition to the intake side of the Ortal power vent fan. Attaches to the Duravent CVS® fitting installed on the fan.	
	or		
<b>B2</b> TX-35DPFIA	Fan intake adapter	For use on a PV fan when space is tight. <b>Remove the Duravent adapter and install this one.</b>	

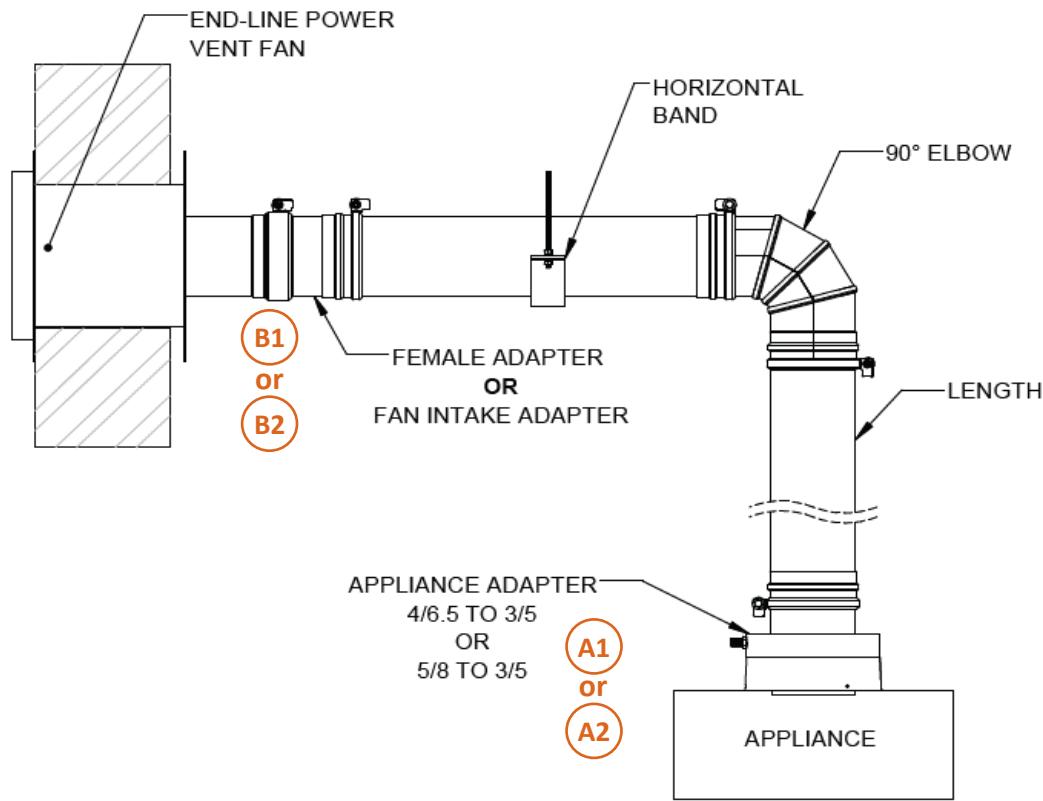




Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## Inline 180 and Inline 90 Power Vent Installations

Part code	Part name	Description	Visual
<b>1. Choose the appliance adapter required</b>			
<b>A1</b> TX-35DPR43	Appliance adapter 4x6 5/8	Use the DPR43 to connect to appliances with a 4" x 6 5/8" flue collar	
<b>or</b>			
<b>A2</b> TX-35DPR53	Appliance adapter 5/8	Use the DPR53 to connect to appliances with a 5" x 8" flue collar	
<b>2. Choose the adapter to connect to the fan intake</b>			
<b>B1</b> TX-35DPFAD	ICC/CVS Female adapter	An adapter is required to transition to the intake side of the Ortal power vent fan. Attaches to the Duravent CVS® fitting installed on the fan.	
<b>or</b>			
<b>B2</b> TX-35DPFIA	Fan intake adapter	For use on a PV fan when space is tight. <b>Remove the Duravent adapter and install this one</b>	
<b>3. Choose the adapter to connect to the fan outlet</b>			
<b>C1</b> TX-35DPMAD	CVS/ICC Male adapter	An adapter is required to transition to the outlet side of the Ortal power vent fan. <b>Attaches to the Duravent CVS® fitting installed on the fan.</b>	
<b>or</b>			
<b>C2</b> TX-35DPFOA	Fan outlet adapter	For use on a PV fan when space is tight. <b>Remove the Duravent adapter and install this one.</b>	
<b>4. Choose a termination</b>			
<b>D1</b> TX-35DPHT	Horizontal Termination	Required if terminating horizontally.	
<b>or</b>			
<b>D2</b> TX-35DPVT	Vertical Termination	Required if terminating vertically.	

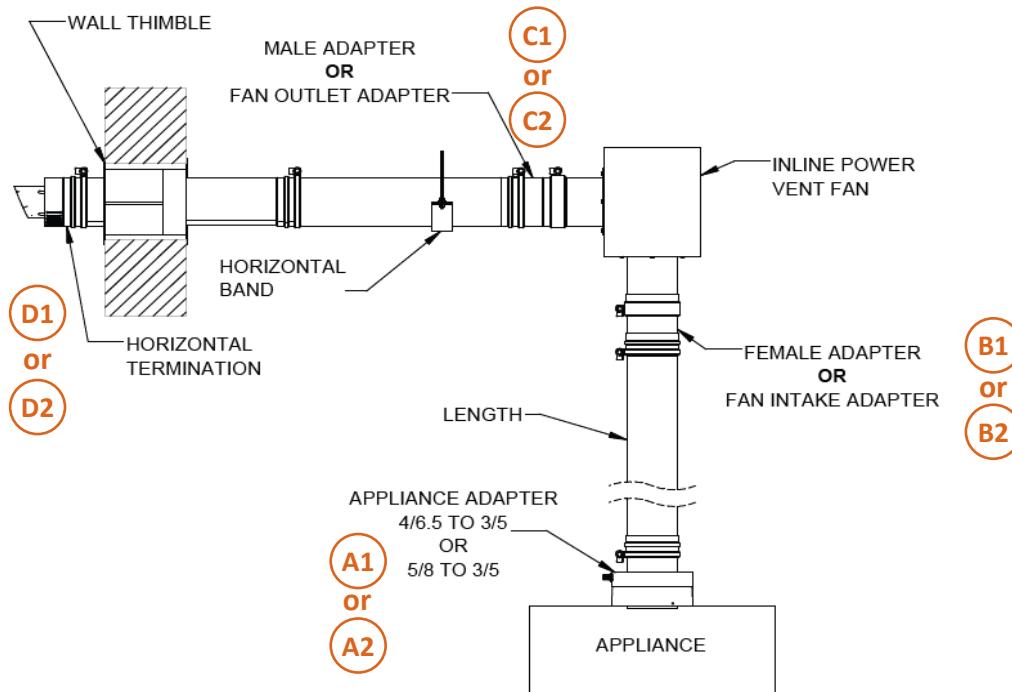



Serving you with Five Distribution Centers - Seattle, WA - Sacramento, CA - Denver, CO - Minneapolis, MN - Dallas, TX

## EXCELDirect Power Vent® vs CVS®

Lengths	EXCELDirect Power Vent	Duravent CVS	3/5 power vent typical installations
6" Length	<b>TU-35DPL6</b>	35CVS-06	
12" Length	<b>TU-35DPL1</b>	35CVS-12	
24" Length	<b>TU-35DPL2</b>	35CVS-24	
36" Length	<b>TU-35DPL3</b>	35CVS-36	
48" Length	<b>TU-35DPL4</b>	N/A	
12" Length with drain	<b>TU-35DPLD</b>	35CVS-CD	
12" Slip Length	<b>TU-35DPLS1</b>	35CVS-12TA	
24" Slip Length	<b>TU-35DPLS2</b>	N/A	
Elbows	EXCELDirect Power Vent	Duravent CVS	
Elbow 45°	<b>TV-35DPE45</b>	35CVS-E45	
Elbow 90°	<b>TV-35DPE90</b>	35CVS-E90	
Supports & Firestops	EXCELDirect Power Vent	Duravent CVS	
Wall Thimble	<b>TX-35DPWT</b>	35CVS-WT	
Insulated Wall Thimble	<b>TX-35DPWTI</b>	35CVS-WTP	
Firestop Ceiling Support	<b>TX-35DPFS</b>	35CVS-FS	
Firestop Plates	<b>TX-35DPFSP</b>	N/A	
Base Support	<b>TX-35DPBS</b>	N/A	
Wall Support	<b>TX-35DPWS</b>	35CVS-WS	
Offset Support	<b>TX-35DPOS</b>	N/A	
Roof Support	<b>TX-35DPSR</b>	35CVS-RS	
Horizontal Band	<b>TX-35DPHB</b>	N/A	
Attic Radiation Shield	<b>TX-35DPAS</b>	35CVS-IS	
Terminations	EXCELDirect Power Vent	Duravent CVS	
Horizontal Termination	<b>TX-35DPHT</b>	35CVS-HCR	
Vertical Termination	<b>TX-35DPVT</b>	35CVS-VC	
Flashings and Collars	EXCELDirect Power Vent	Duravent CVS	
Flat Flashing	<b>TW-35DPF</b>	N/A	
Flat Flashing 1/12-7/12	<b>TW-35DPFA</b>	35CVS-F	
Flat Flashing 8/12-12/12	<b>TW-35DPFB</b>	35CVS-F	
Storm Collar	<b>TW-35DPSC</b>	35CVS-SC	
Accessories	EXCELDirect Power Vent	Duravent CVS	
Fan Intake Adapter	<b>TX-35DPFIA</b>	N/A	
ICC/CVS Female Adapter	<b>TX-35DPFAD</b>	N/A	
Fan Outlet Adapter	<b>TX-35DPFOA</b>	N/A	
CVS/ICC Male Adapter	<b>TX-35DPMAD</b>	N/A	
Adapter 4/6.5 to 3/5	<b>TX-35DPR43</b>	SASSMADP-4/6	
Adapter 5/8 to 3/5	<b>TX-35DPR53</b>	SASSMADP-5/8	
Locking Band	<b>TX-35DPLB</b>	N/A	

